


## 3225 Sforza LED centre road with elliptical lenses

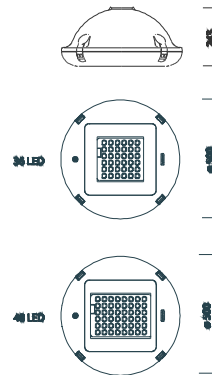

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
327130-00	CLD CELL	10.60	glazed silver+graphite	0x0x243 Ø500	34	LED white 34W-5544m @ 350mA-4000K-CRI>70
327131-00	CLD CELL	10.60	glazed silver+graphite	0x0x243 Ø500	46	LED white 46W-7392lm @ 350mA-4000K-CRI>70

Urban elegance often rhymes with simplicity. A need is felt for simple and easily recognizable shapes in an urban landscape increasingly crowded with stimuli and confused signals.

Sforza conveys a sense of peace and reliability, which is just what a good urban lighting project requires. (also indoor version)

Housing/Frame: in die-cast aluminium. With provision for central connection.

Diffuser: tempered glass, 5 mm thick, thermal shock and impact resistant (UNI EN 12150 tests .- 1/2001).

Reflector: Metallized polycarbonate

Coating: in different stages. By epoxy cationic electrocoating, resistant to corrosion and saline environments. Second coating using sand-blasted silver coloured and graphite grey acrylic resin, green, UV stabilized. Additional colours are available upon request.

Equipment: device for automatic temperature control. In the event of an unexpected LED temperature rise caused by particular weather conditions or a LED failure, the system will reduce the luminous flux to lower the working temperature and guarantee proper operation. Complete with quick connection. Standard knife switch.

Sforza is equipped with led CRI 70 - 5544/7392lm - 4000K - 350mA (on request 530mA 8100/10800lm - 54/72W). The total return of the equipment is close to 100%. Each LED module is equipped with a lens with high efficiency

LED: Latest generation LED technology, Ta-30+40°C life 60.000h L70B20

Photobiological safety class: exempt group

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.