


3300 Visconti 1 - with diffuser

Housing/Frame: in die-cast aluminium.
 Optics: In 99.85 aluminium, anodically oxidized and polished.
 Diffuser: diffuser in injection moulded V2 self-extinguishing , UV stabilised clear polycarbonate
 Coating: in different stages. By epoxy cationic electrocoating, resistant to corrosion and saline environments. Second coating using graphite grey acrylic resin, UV stabilized.
 Standard supply: in case of maintenance, the frame remains suspended by way of brackets once opened. Standard knife switch and quick connector for connection to the line. Wiring on removable tray for easy maintenance.
 Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

- Download**
 DXF 2D
 - 3300.dxf
 3DS
 - disano_3300_visconti.3ds
 3DM
 - disano_3300_visconti.3dm
 Montaggi
 - visconti-3300-1-3-7-10.pdf

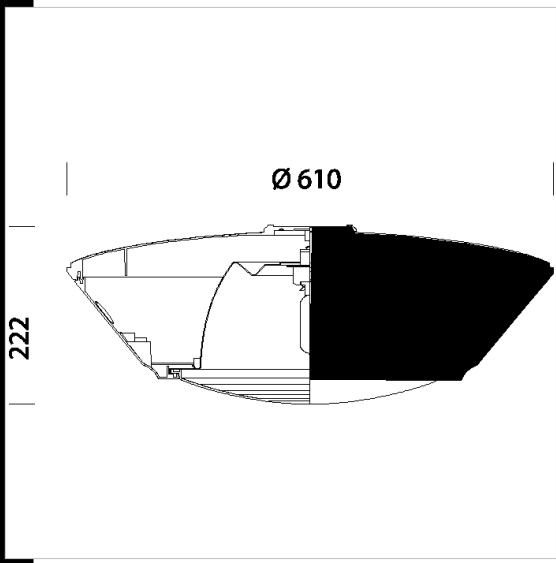

| Code | Gear | Kg | Watt | Base | Lamps | Colour |
|-----------|-------|-------|----------|------|--------------------|----------|
| 328000-00 | CNR-L | 11,62 | CDM-T 70 | G12 | 6600lm-3000K-Ra 1b | GRAPHITE |

Accessories



- 15 ceiling mount



- 380 Suspension 3x