

3302 Visconti 3

Visconti is the new urban lighting system that enables designers to get the best performance from the new light sources (LED and white light), with all the quality of the 'made in Italy' design.

The fixture's exclusive design is enhanced with an innovative pole, which is a visible sign of the changes occurred in the new town planning and redevelopment projects.

Visconti is best suited to illuminate main streets in residential centres. As a wall-mounted fixture, it is the perfect solution to establish a dialogue between classic and modern architecture, while the suspended version enables a calibrated and wise use of light.

All the experience and quality of Disano products lie in the materials and technology of its products combined with easy installation and maintenance.

Housing/Frame: in die-cast aluminium.

Optics: In 99.85 aluminium, anodically oxidized and polished.

Diffuser: tempered glass, 5 mm thick, thermal shock and impact resistant (UNI EN 12150 tests - 1/2001)


Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Standard supply: in case of maintenance, the frame remains suspended by way of brackets once opened. Standard knife switch and quick connector for connection to the line. Wiring on removable tray for easy maintenance.

Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

Always use with acc. 280/81/82 or 283

Wind surface: L:771cm² 905cm².

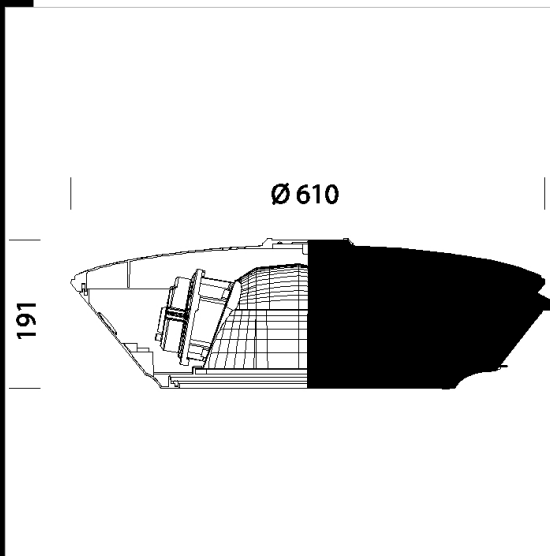

Download

DXF 2D
- 3302.dxf

3DS
- disano_3302_visconti.3ds

3DM
- disano_3302_visconti.3dm

Montaggi
- visconti-3302-4-5-6-8-9.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
328020-00	CNR-L	11.22	SAP-T 70-6000lm-2000K-Ra 4	84 W	E27	GRAPHITE
328021-00	CNR-L	11.76	SAP-T 100-9000lm-2000K-Ra 4	116 W	E40	GRAPHITE
328022-00	CNR-L	12.34	SAP-T 150-17200lm-2000K-Ra 4	166 W	E40	GRAPHITE
328023-00	CNR-L	11.52	CDO-TT 70-6300lm-2800K-Ra 1b	83 W	E27	GRAPHITE
328024-00	CNR-L	11.60	CDO-TT 100-8800lm-2800K-Ra 1a	116 W	E40	GRAPHITE
328025-00	CNR-L	12.18	CDO-TT 150-13500lm-2800K-Ra 1b	166 W	E40	GRAPHITE

Accessories



- 528 union 60mm



- 280 fork



- 281 Arm



- 282 Double Arm



- 283 Wall mounting

Posts



- 1487 poles to be sunk into the ground - Visconti



- 1485 pole with base - Visconti



- 1418 poles to be sunk into the ground ø102-159



- 1417 pole with base ø102-159

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated