




Download

- DXF 2D
- 3308h.dxf
- 3DS
- disano_3308_visconti.3ds
- 3DM
- disano_3308_visconti.3dm
- Montaggi
- visconti.pdf
- BIM
- 3308 Visconti 9 LED - wide beam +
Acc. 283 - 20200616.zip
- 3308 Visconti 9 LED - wide beam -
20200616.zip

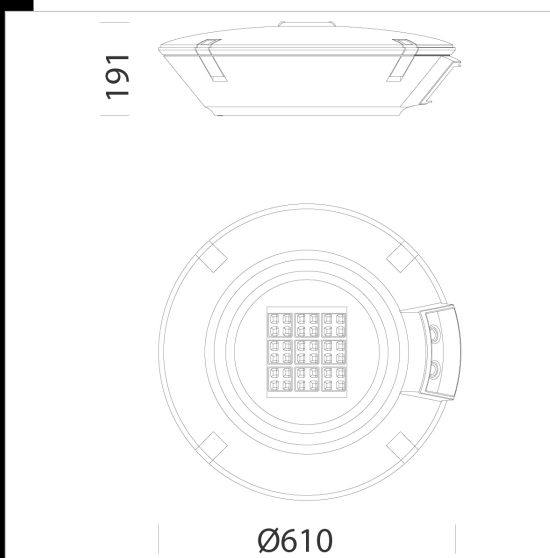

3308 Visconti 9 LED - wide beam

Visconti is the new urban lighting system that enables designers to get the best performance from the new light sources LED, with all the quality of the 'made in Italy' design.

The fixture's exclusive design is enhanced with an innovative pole, which is a visible sign of the changes occurred in the new town planning and redevelopment projects.

In its LED version, Visconti is equipped with optics designed to obtain greater light intensity in different urban routes: roads for vehicles, walkways for pedestrians and green areas.

Visconti is best suited to illuminate main streets in residential centres. As a wall-mounted fixture, it is the perfect solution to establish a dialogue between classic and modern architecture, while the suspended version enables a calibrated and wise use of light.

All the experience and quality of Disano products lie in the materials and technology of its products combined with easy installation and maintenance.

Housing/Frame: in die-cast aluminium.

Diffuser: tempered glass, 5 mm thick, thermal shock and impact resistant (UNI EN 12150 tests - 1/2001)

Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cathaphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Standard supply: complete with socket-plug. Device for automatic temperature control. In the event of an unexpected LED temperature rise caused by particular weather conditions or a LED failure, the system will reduce the luminous flux to lower the working temperature and guarantee proper operation. Supplied with double insulation switch that cuts off electricity when the cover is opened.

LED: Latest generation LED technology, Ta-30+40°C life 80%: 80.000h (L80B20).

Photobiological safety class: exempt group

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Always use with acc. 280/81/82 or 283

Wind surface: L: 771cm² 905cm².

Article available until stocks are exhausted

| Code | Gear | Kg | Lumen Output-K-CRI | WTot | Colour | Surge |
|-----------|------|-------|--------------------------|------|----------|-------|
| 328090-00 | CLD | 10.94 | LED-10120lm-4000K-CRI>70 | 60 W | GRAPHITE | 6/8kV |
| 328090-39 | CLD | 11.14 | LED-7626lm-3000K-CRI>70 | 60 W | GRAPHITE | 6/8kV |

Accessories



- 528 union 60mm



- 280 fork



- 281 Arm



- 282 Double Arm



- 283 Wall mounting

Posts



- 1487 poles to be sunk into the ground ø102



- 1485 pole with base ø102



- 1418 poles to be sunk into the ground ø102-159



- 1417 pole with base ø102-159

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated