


1787 Astro LED - asymmetric 50°

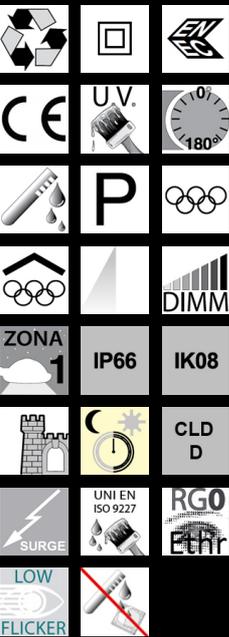


Download

- DXF 2D
- 1787n.dxf
- 3DS
- disano_1787_astro_16_led.3ds
- disano_1787_astro_24_led.3ds
- disano_1787_astro_12_LED.3ds
- disano_1787_astro_32_led.3ds
- 3DM
- disano_1787_astro_12_LED.3dm
- disano_1787_astro_24_LED.3dm
- disano_1787_astro_16_LED.3dm
- disano_1787_astro_32_LED.3dm

- Montaggi
- astro 01-21.pdf
- BIM
- 1787 Astro LED - asymmetric 50° - 20200303.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

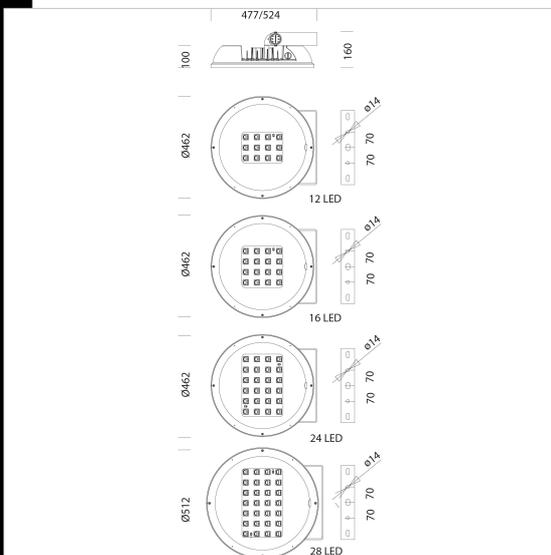

Lights with great aesthetic quality, superior energy-efficiency and long life: in order to obtain the best from the new lighting technology, lighting systems need the technical requirements and the reliability of state-of-the-art fixtures, such as the ones designed by Disano, a company with over fifty years of experience in the lighting sector.

Astro was created to meet these criteria and is available in three different versions: for interiors, centre-road application and as a spotlight.

Simple and linear aesthetics combines with a sophisticated technology to offer exceptional technical performance: Astro was designed to take the best from all the potential of the new high-performance LED lights.

Quality materials and the fixture's high reliability, as always guaranteed by Disano, are a safe investment.

The product offers the possibility to choose the correct drive current for LEDs and have the right power under specific design conditions

Housing: in die-cast aluminium with cooling fins integrated into the cover.

Diffuser: tempered glass, 4 mm thick, resistant to thermal shocks and impacts (UNI-EN 12150-1: 2001).

Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.

Standard supply: device for automatic temperature control. Electronic safety device to protect the LED module and the related ballast compliant with EN 61547. It works in two modes: - differential mode: surge between power cables and between the phase and neutral. - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole. Upon request: protection up to 10KV. Coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments. Heat sink: the heat dissipation system is specially designed and made to allow the operation of the LED lights with temperatures below 50° (Tj = 85°), thus guaranteeing excellent performance/efficiency and durability.

The possibility to choose the correct drive current for LEDs. Using a lower current will improve the efficiency of fixtures and therefore increase energy saving.

Optics: in PMMA, highly resistant to temperature and UV radiation

LED: Latest generation LED technology, Ta-30 + 40°C life 12-16-24-28 LED 90%: 100000h (L90B10) / 32-36 LED 80000h (L90B10).

Photobiological safety class: exempt group EN62471.

Upon request:

- with power supply DIG dimmable with subcode 0041.
- with virtual midnight subcode 30.
- power line carrier remote control systems subcode 0078.

Wind surface:
ø462 : L=551cm2 - F1715cm2 ø512 : L=607cm2 - F=2100cm2

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour	Surge
330079-00	CLD	10.45	LED-9732lm-4000K-CRI 70	101 W	GREY	6/8kV
330078-00	CLD	10.43	LED-9732lm-4000K-CRI 70	101 W	GRAPHITE	6/8kV
330074-00	CLD	9.90	LED-12976lm-4000K-CRI 70	137 W	GREY	6/8kV
330075-00	CLD	9.90	LED-12976lm-4000K-CRI 70	137 W	GRAPHITE	6/8kV
330070-00	CLD	10.50	LED-20438lm-4000K-CRI 70	202 W	GREY	6/8kV
330072-00	CLD	10.50	LED-20438lm-4000K-CRI 70	202 W	GRAPHITE	6/8kV
330071-00	CLD	14.00	LED-25953lm-4000K-CRI 70	235 W	GREY	6/8kV
330073-00	CLD	13.99	LED-25953lm-4000K-CRI 70	235 W	GRAPHITE	6/8kV

Accessories



- 24 protective guard