

3250 Modoled LED

Housing: in extruded aluminium with incorporated heat-sink to guarantee LED durability. Supplied with double insulation switch that cuts off electricity when the fixture is opened.

Reflector: rotary-symmetric type.

LED: Ta-30 + 40°C life 80.000h to 70% L70B20

Photobiological safety class: exempt group EN62471.

Heat sink: the heat dissipation system is specially designed and made to allow the operation of the LED lights with temperatures below 50° (Tj = 85°), thus guaranteeing excellent performance/efficiency and durability.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.


Download

DXF 2D
- 3250n.dxf

3DS
- disano_3250_modoled_18led.3ds
- disano_3250_modoled_12led.3ds

3DM
- disano_3250_modoled_12led.3dm
- disano_3250_modoled_18led.3dm

Montaggi
- modoled 08-20.pdf
- modoled sospensione.dxf
- acc-534.pdf

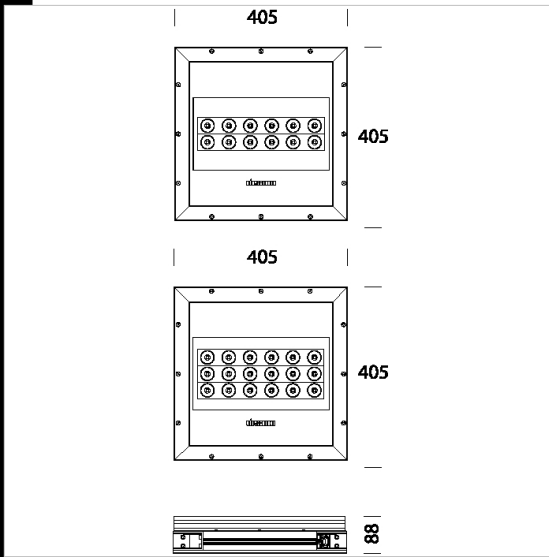

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
330103-00	CLD CELL	9.75	LED-11726lm-700mA-4000K-CRI 80	102 W	NAT. OXIDIZED
330104-00	CLD CELL	9.79	LED-17590lm-700mA-4000K-CRI 80	152 W	NAT. OXIDIZED
330105-00	CLD CELL	9.79	LED-11873lm-700mA-4000K-CRI 80	102 W	NAT. OXIDIZED

Accessories



- 2518 simple suspension



- 534 Bracket - Modoled

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated