

Download

DXF 2D
- 3250n.dxf

3DS

- disano_3250_modoled_18led.3ds
- disano_3250_modoled_12led.3ds

3DM

- disano_3250_modoled_12led.3dm
- disano_3250_modoled_18led.3dm

Montaggi

- modoled 08-20.pdf
- modoled sospensione.dxf
- acc-534.pdf



3250 Modoled LED

Housing: in extruded aluminium with incorporated heat-sink to guarantee LED durability. Supplied with double insulation switch that cuts off electricity when the fixture is opened.


Reflector: rotary-symmetric type.

LED: Ta-30 + 40°C life 80.000h to 70% L70B20

Photobiological safety class: exempt group EN62471.

Heat sink: the heat dissipation system is specially designed and made to allow the operation of the LED lights with temperatures below 50° (Tj = 85°), thus guaranteeing excellent performance/efficiency and durability.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

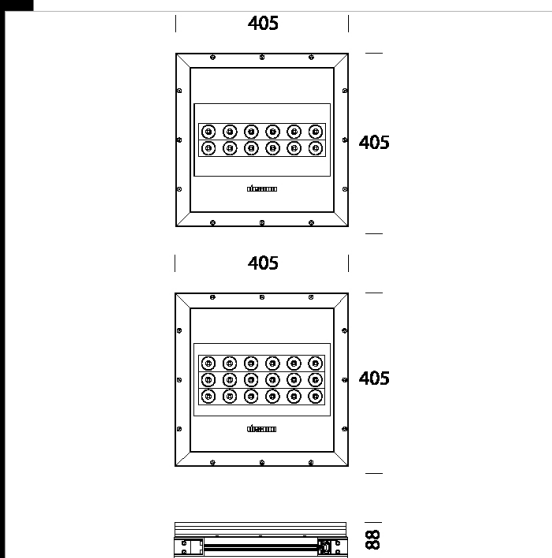

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
330104-00	CLD CELL	9,79	LED-17590lm-700mA-4000K-CRI 80	152 W	OSSIDATO NAT.
330105-00	CLD CELL	9,79	LED-11873lm-700mA-4000K-CRI 80	102 W	OSSIDATO NAT.
330103-00	CLD CELL	9,75	LED-11726lm-700mA-4000K-CRI 80	102 W	OSSIDATO NAT.
330106-00	CLD CELL	9,83	LED-17811lm-700mA-4000K-CRI 80	152 W	OSSIDATO NAT.

Accessori



- 2518 simple suspension



- 534 Bracket - Modoled

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated