

2785 Astro - wide beam with polycarbonate diffuser



Astro LED is the reflector that achieves the most advanced results in industrial, sporting and large area lighting

The concept of Human Centric Light, which is based on a perfect lighting control. Lights with great aesthetic quality, superior energy-efficiency and long life: in order to obtain the best from the new lighting technology, lighting systems need the technical requirements and the reliability of state-of-the-art fixtures, such as the ones designed by Disano, a company with over fifty years of experience in the lighting sector.

Simple and linear aesthetics combines with a sophisticated technology to offer exceptional technical performance: Astro was designed to take the best from all the potential of the new high-performance LED lights.

Quality materials and the fixture's high reliability, as always guaranteed by Disano, are a safe investment.

Housing: in die-cast aluminium with cooling fins integrated into the cover.

Diffuser: Injection moulded, in V2 self-extinguishing, UV stabilized, clear polycarbonate, ideal for the food industry.

Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.

Standard supply: device for automatic temperature control. In the event of an unexpected temperature rise caused by particular weather conditions, the system will reduce the luminous flux to lower the working temperature and guarantee proper operation. Electronic safety device to protect the LED module and the related ballast compliant with EN 61547. It works in two modes: - differential mode: surge between power cables and between the phase and neutral. - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole. Upon request: for Class II fixtures, protection up to 10KV. Equipment: complete with watertight IP68 connector for line connection. Anti-condensation valve for air recirculation.

The possibility to choose the correct drive current for LEDs. Using a lower current will improve the efficiency of fixtures and therefore increase energy saving.

Optics: polycarbonate with micro-faceted finish. LEDs with lens combined with flux recovery system.

Photobiological safety class: exempt group EN62471.

Emergency version: 1h, acc. 1175 to be purchased separately

Upon request:

- With power supply DIG dimmable with subcode 0041.

- Emergency wiring with centralized power supply CLD CELL-EC (sub-code -0050).

It is also available with sensors

Luminous flux maintenance

330156-00 / 330157-00: 90% - 100.000h - (L90B10) - Ta = -40°C ÷ +45°

330150-00 / 330153-00: 90% - 100.000h - (L90B10) - Ta = -40°C ÷ +45°


330151-00 / 330154-00: 90% - 100.000h - (L90B10) - Ta = -40°C ÷ +40°

330152-00 / 330155-00: 90% - 100.000h - (L90B10) - Ta = -40°C ÷ +40°

(request in head office for higher Ta..)

This lighting fixture meets the global standards of the International Food Safety (IFS), the British Retail Consortium (BRC) and the HACCP Directive regarding the safety of the lighting systems in the food industry.

In any case, it will be necessary to contact appointed designers and Disano's consultancy office to check the compatibility of materials with the food products processed and in all industrial environments where sanitizing systems are installed.

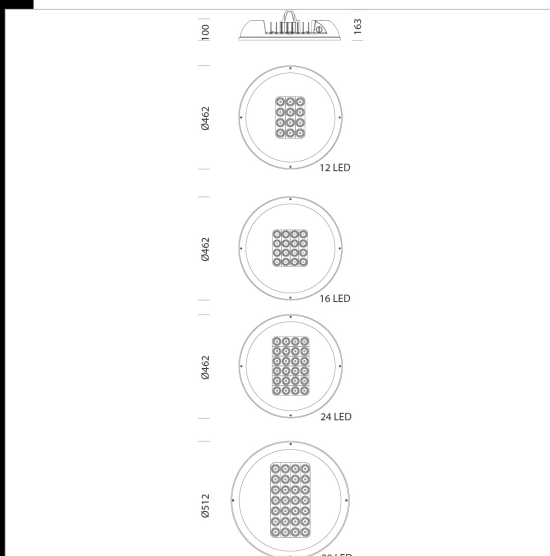

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour	Surge
330156-00	CLD	10,12	LED-10712lm-4000K-CRI 80	101 W	GREY	6/8kV
330157-00	CLD	10,12	LED-10712lm-4000K-CRI 80	101 W	GRAPHITE	6/8kV
330150-00	CLD	9,24	LED-14284lm-4000K-CRI 80	135 W	GREY	6/8kV
330153-00	CLD	9,36	LED-14284lm-4000K-CRI 80	135 W	GRAPHITE	6/8kV
330151-00	CLD	9,34	LED-21426lm-4000K-CRI 80	203 W	GREY	6/8kV
330154-00	CLD	9,26	LED-21426lm-4000K-CRI 80	203 W	GRAPHITE	6/8kV
330152-00	CLD	10,56	LED-26870lm-4000K-CRI 80	235 W	GREY	6/8kV
330155-00	CLD	10,54	LED-26870lm-4000K-CRI 80	235 W	GRAPHITE	6/8kV
330156-07	CLD-E	9,66	LED-10712lm-4000K-CRI 80	104 W	GREY	6/8kV
330157-07	CLD-E	9,66	LED-10712lm-4000K-CRI 80	104 W	GRAPHITE	6/8kV
330150-07	CLD-E	9,45	LED-14284lm-4000K-CRI 80	138 W	GREY	6/8kV
330153-07	CLD-E	9,10	LED-14284lm-4000K-CRI 80	138 W	GRAPHITE	6/8kV
330151-07	CLD-E	11,60	LED-21426lm-4000K-CRI 80	206 W	GREY	6/8kV
330154-07	CLD-E	12,00	LED-21426lm-4000K-CRI 80	206 W	GRAPHITE	6/8kV
330152-07	CLD-E	12,50	LED-26870lm-4000K-CRI 80	236 W	GREY	6/8kV
330155-07	CLD-E	10,84	LED-26870lm-4000K-CRI 80	236 W	GRAPHITE	6/8kV
330156-0041	CLD-D-D	10,12	LED-10712lm-4000K-CRI 80	101 W	GREY	6/8kV
330157-0041	CLD-D-D	9,22	LED-10712lm-4000K-CRI 80	101 W	GRAPHITE	6/8kV
330150-0041	CLD-D-D	9,11	LED-14284lm-4000K-CRI 80	135 W	GREY	6/8kV
330153-0041	CLD-D-D	9,98	LED-14284lm-4000K-CRI 80	135 W	GRAPHITE	6/8kV
330151-0041	CLD-D-D	9,34	LED-21426lm-4000K-CRI 80	203 W	GREY	6/8kV
330154-0041	CLD-D-D	9,26	LED-21426lm-4000K-CRI 80	203 W	GRAPHITE	6/8kV
330152-0041	CLD-D-D	10,82	LED-26870lm-4000K-CRI 80	235 W	GREY	6/8kV
330155-0041	CLD-D-D	10,60	LED-26870lm-4000K-CRI 80	235 W	GRAPHITE	6/8kV

Accessori



- 538 suspension for ceiling fitting



- Presence sensors - STAND-ALONE

Download

DXF 2D
- 2785h.dxf

3DS

- disano_2785_astro_32_LED.3ds
- disano_2785_astro_24_LED.3ds
- disano_2785_astro_12_LED.3ds
- disano_2785_astro_16_LED.3ds

3DM

- disano_2785_astro_24_LED.3dm
- disano_2785_astro_32_LED.3dm
- disano_2785_astro_16_LED.3dm
- disano_2785_astro_12_LED.3dm

Montaggi

- astroem.pdf
- Astro suspensions.pdf
- astro 01-21.pdf

BIM

- 2785 Astro LED - wide beam with polycarbonate diffuser -

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

2785 Astro - wide beam with polycarbonate diffuser

Accessori



- Presence and light sensors -
DIMM DALI



- 1175 EM box - 997651-00

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated