


### 3657 Iris LED

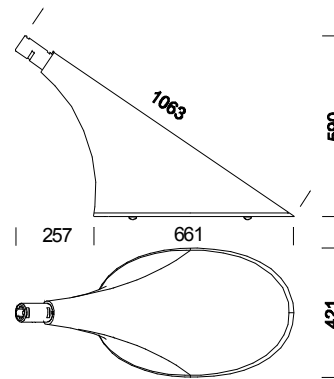

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
330260-00	CLD CELL	8.00	al. track	1063x421x590	70	LED white 70W-9600lm @ 700mA-4000K-CRI70
330261-00	CLD CELL	8.10	al. track	1063x421x590	94	LED white 94W-12800lm @ 700mA-4000K-CRI≥70

Housing: Made of die-cast aluminium.

Diffuser: Tempered glass 4 mm thick, resistant to impact and thermal shock (UNI EN 12150-1: 2001 tests).

Coating: In several stages. First stage: epoxy cationic electrocoating, resistant to corrosive and saline environments. The second stage is a UV stabilizing priming. Lastly, a rough finish with metallised silver acrylic coating is applied.

Regulations: Manufactured in compliance with applicable EN 60598 standards. The level of protection complies with the EN60529 standard.

LED: Power factor ≥0.9.

Luminous flux maintenance: 70% 60000h (L70B20)