

2792 Astro HE - UGR<22 - elliptical beam



Today, LED lighting is regarded as an important factor in technological growth. Renovating the lighting system in the workplace improves the quality of working conditions, increasing the workers' safety and productivity. But notable results can be achieved only with high quality products like Astro LED by Disano.

Designed to reach maximum performance levels in both new and existing systems, Astro LED is a high bay with an industrial design, also used successfully in sport facilities and commercial areas.

Astro is appreciated above all for the quality of the light, determined by a very high colour rendering, which is particularly important in precision industrial processes, and very low flicker to protect the safety and health of workers.

The remarkable energy savings compared to old lighting systems allow fast payback and the economic benefit is increased by the system's long life.

Housing: in die-cast aluminium with cooling fins integrated into the cover.

Diffuser: tempered glass, 4 mm thick, resistant to thermal shocks and impacts (UNI-EN 12150-1: 2001).

Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.

Standard supply: device for automatic temperature control. In the event of an unexpected temperature rise caused by particular weather conditions, the system will reduce the luminous flux to lower the working temperature and guarantee proper operation. Electronic safety device to protect the LED module and the related ballast compliant with EN 61547. It works in two modes: - differential mode: surge between power cables and between the phase and neutral. - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole. Upon request: for Class II fixtures, protection up to 10KV. Equipment: complete with watertight IP68 connector for line connection. Anti-condensation valve for air recirculation.

Heat sink: the heat dissipation system is specially designed and made to allow the operation of the LED lights with temperatures below 50° (Tj = 85°), thus guaranteeing excellent performance/efficiency and durability.

The possibility to choose the correct drive current for LEDs. Using a lower current will improve the efficiency of fixtures and therefore increase energy saving.

Optics: in PMMA, highly resistant to temperature and UV radiation.

Photobiological safety class: exempt group EN62471.

LED: Power factor 0.95

Emergency version: 1h, acc. 1175 to be purchased separately


Upon request:

- With power supply DIG dimmable with subcode 0041.

- Emergency wiring with centralized power supply CLD CELL-EC (sub-code -0050).

It is also available with sensors

Luminous flux maintenance 90% - 50.000h - (L90B10)

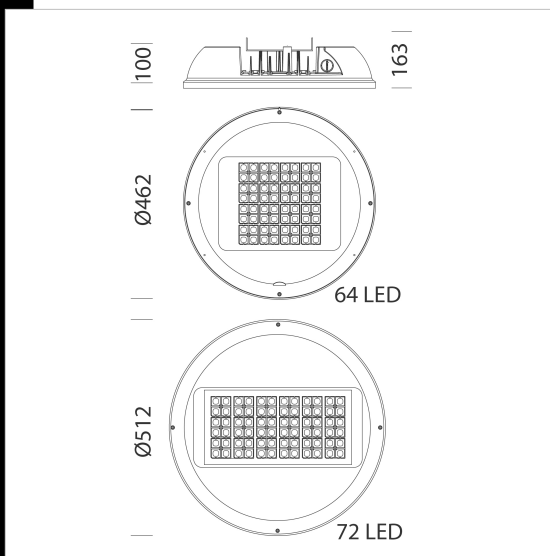

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour	Surge
330266-00	CLD	8,24	LED-19202lm-4000K-CRI 80	132 W	GRAPHITE	4kV
330266-07	CLD-E	8,24	LED-19202lm-4000K-CRI 80	135 W	GRAPHITE	4kV
330267-00	CLD	8,24	LED-22618lm-4000K-CRI 80	151 W	GRAPHITE	4kV
330267-07	CLD-E	8,24	LED-22618lm-4000K-CRI 80	151 W	GRAPHITE	4kV
330268-00	CLD	10,08	LED-26524lm-4000K-CRI 80	195 W	GRAPHITE	4/6kV
330268-07	CLD-E	9,78	LED-26524lm-4000K-CRI 80	195 W	GRAPHITE	4/6kV

Accessori



- 24 protective guard



- 533



- 1175 EM box - 997651-00



- 538 suspension for ceiling fitting



Download

DXF 2D  
- 2792vv.dxf

Montaggi  
- Astro suspensions.pdf  
- astro hp-he 02-21.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated