




### 3260 Modoled - LED

Housing: In extruded aluminum with built-in dissipator  
 Diffuser: clear, tempered glass, 4 mm thick, resistant to thermal shock and impacts (UNI-EN 12150-1 : 2001)  
 Standard supply: Automatic temperature control inside the device with automatic resetting. Safety diode to protect against voltage peaks compliant with EN 61547.  
 Optics: in PMMA, highly resistant to temperature and UV radiation  
 Heat sink: the heat dissipation system is specially designed and made to allow the operation of the LED lights with temperatures below 50° (Tj = 85°), thus guaranteeing excellent performance/efficiency and durability.  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP66IK08 degree of protection according to EN 60529 standards.  
 LED: Latest generation LED technology, Ta-30+40°C life 80% >100.000h L80B20. Power factor >0.9  
 Photobiological safety class: exempt group EN62471.

#### Download

- DXF 2D  
- 3260.dxf
- 3DS  
- disano\_3260\_modoled\_18led.3ds  
- disano\_3260\_modoled\_12led.3ds
- 3DM  
- disano\_3260\_modoled\_12led.3dm  
- disano\_3260\_modoled\_18led.3dm
- Montaggi  
- modoled 08-20.pdf
- BIM  
- 3260 Modoled - LED + Acc.530 - 20200623.zip  
- 3260 Modoled - LED - 20200623.zip

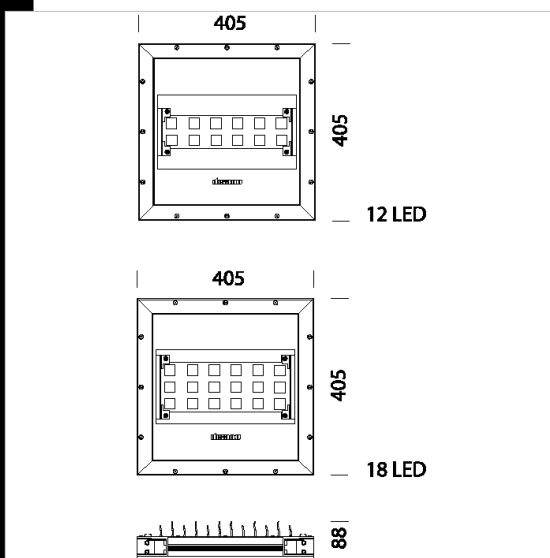

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
330303-00	CLD	9,31	LED-10426lm-700mA-4000K-CRI 80	101 W	NAT. OXIDIZED
330303-12	CLD CELL-D	9,21	LED-10426lm-700mA-4000K-CRI 80	101 W	NAT. OXIDIZED
330304-00	CLD	9,55	LED-15640lm-700mA-4000K-CRI 80	152 W	NAT. OXIDIZED
330304-12	CLD CELL-D	9,51	LED-15640lm-700mA-4000K-CRI 80	152 W	NAT. OXIDIZED

#### Accessori



- 531 bracket



- 530 adjustable bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated