


3263 Modoled - LED mixed

Housing: In extruded aluminum with built-in dissipator
 Diffuser: clear, tempered glass, 4 mm thick, resistant to thermal shock and impacts (UNI-EN 12150-1 : 2001)
 Standard supply: Automatic temperature control inside the device with automatic resetting. Safety diode to protect against voltage peaks compliant with EN 61547.
 Optics: in PMMA, highly resistant to temperature and UV radiation
 Heat sink: the heat dissipation system is specially designed and made to allow the operation of the LED lights with temperatures below 50° (Tj = 85°), thus guaranteeing excellent performance/efficiency and durability.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP66IK08 degree of protection according to EN 60529 standards.
 LED: Latest generation LED technology, Ta-30+40°C life 80% >100.000h L80B20. Power factor >0.9
 Photobiological safety class: exempt group EN62471.

Download

- DXF 2D
- 3260.dxf
- 3DS
- disano_3263_modoled_18led.3ds
- disano_3263_modoled_12led.3ds
- 3DM
- disano_3263_modoled_18led.3dm
- disano_3263_modoled_12led.3dm
- Montaggi
- modoled 08-20.pdf
- modoled galerie1.dxf
- BIM
- 3263 Modoled - LED mixed - 20200623.zip
- 3263 Modoled - LED mixed + Acc.530 - 20200623.zip

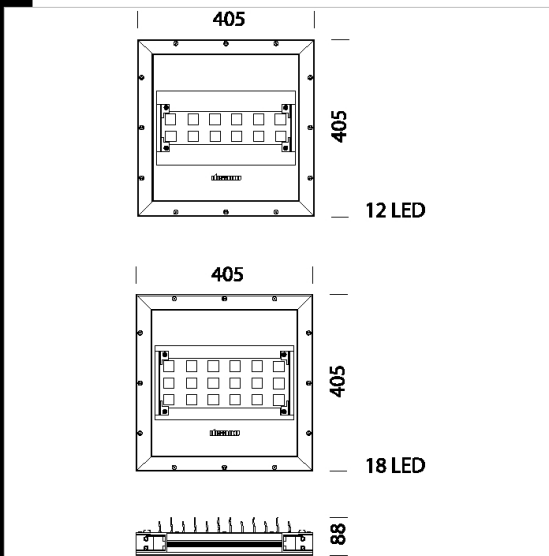

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
330326-00	CLD	8,75	LED-9855lm-700mA-4000K-CRI 80	101 W	NAT. OXIDIZED
330326-12	CLD CELL-D	8,55	LED-9855lm-700mA-4000K-CRI 80	102 W	NAT. OXIDIZED
330327-00	CLD	8,75	LED-14782lm-700mA-4000K-CRI 80	152 W	NAT. OXIDIZED
330327-12	CLD CELL-D	9,80	LED-14782lm-700mA-4000K-CRI 80	152 W	NAT. OXIDIZED

Accessori



- 531 bracket



- 530 adjustable bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated