




### 3269 Mini Stelvio FX T5 - light scattering

Housing and cover: in die-cast aluminium and designed with a very small surface exposed to wind. Cooling fins are integrated into the cover. Pole connection: in die-cast aluminium and with gaskets to secure the frame according to different inclinations. Adjustable ranges: between 0° and 15° for side mount; and between 0° and 10° for mast-top mounting. Inclination pace: 5°. Suited for poles with a diameter 63-60mm. Diffuser: clear, tempered glass, 4 mm thick, resistant to thermal shock and impacts (UNI-EN 12150-1 : 2001). Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating. Standard supply: Automatic temperature control inside the device with automatic resetting. Electronic safety device to protect the LED module and the related ballast compliant with EN 61547. It works in two modes: - differential mode: surge between power cables and between the phase and neutral. - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole. Upon request: protection up to 10KV. Equipment: complete with IP67 airtight connector for mains connection. Supplied with double insulation switch that cuts off electricity when the cover is opened. Energy-saving: the possibility to choose the correct drive current for LEDs will allow you to have the right power under specific design conditions, and also help you deal with maintenance and retrofitting problems. Using a lower current will improve the efficiency of fixtures and therefore increase energy savings, whilst a higher current will result in a higher light flux so that you can reduce the number of fixtures.

Optics: in PMMA, highly resistant to temperature and UV radiation. LED: Ta-30+40°C life 80%: >100.000h (L80B10). Power factor >0.9 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards. Upon request:  
 - with power supply 1-10 V dimmable with subcode 12.  
 - with virtual midnight subcode 30.  
 - power line carrier remote control systems subcode 0078.  
 - Nema Socket, subcode 40  
 - Zhaga Socket, subcode 0054  
 - Coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments.  
 Wind surface: L:139cm² F:400cm².  
**BASIC PROG (BASIC CLD) AVAILABLE FUNCTIONS**  
 Luminous flux setup: This can be done by programming the drive current values requested when ordering/purchasing the fixture.

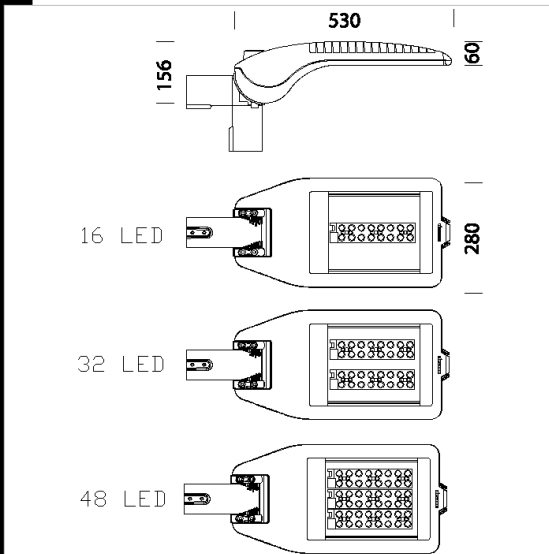

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour	Surge
330460-00	CLD	8.66	LED-4510lm-700mA-4000K-CRI>70	33 W	ANTHRACITE	6/10kV
330461-00	CLD	8.62	LED-8910lm-700mA-4000K-CRI>70	67 W	ANTHRACITE	6/10kV
330463-00	CLD	7.96	LED-13366lm-700mA-4000K-CRI>70	100 W	ANTHRACITE	6/10kV
330467-00	CLD	8.38	LED-2392lm-350mA-4000K-CRI>70	17 W	ANTHRACITE	6/10kV
330468-00	CLD	8.28	LED-4727lm-350mA-4000K-CRI>70	32 W	ANTHRACITE	6/10kV
330469-00	CLD	8.46	LED-7091lm-350mA-4000K-CRI>70	49 W	ANTHRACITE	6/10kV
330464-00	CLD	7.44	LED-3563lm-530mA-4000K-CRI>70	25 W	ANTHRACITE	6/10kV
330465-00	CLD	7.98	LED-7039lm-530mA-4000K-CRI>70	50 W	ANTHRACITE	6/10kV
330466-00	CLD	8.62	LED-10559lm-530mA-4000K-CRI>70	74 W	ANTHRACITE	6/10kV
330460-39	CLD	7.90	LED-4284lm-700mA-3000K-CRI>70	33 W	ANTHRACITE	6/10kV
330461-39	CLD	8.00	LED-8464lm-700mA-3000K-CRI>70	67 W	ANTHRACITE	6/10kV
330463-39	CLD	7.80	LED-12698lm-700mA-3000K-CRI>70	100 W	ANTHRACITE	6/10kV
330467-39	CLD CELL	7.56	LED-2273lm-350mA-3000K-CRI>70	17 W	ANTHRACITE	6/10kV
330468-39	CLD	8.30	LED-4490lm-350mA-3000K-CRI>70	32 W	ANTHRACITE	6/10kV
330469-39	CLD	8.50	LED-6736lm-350mA-3000K-CRI>70	49 W	ANTHRACITE	6/10kV
330464-39	CLD	7.50	LED-3384lm-530mA-3000K-CRI>70	25 W	ANTHRACITE	6/10kV
330465-39	CLD	8.00	LED-6687lm-530mA-3000K-CRI>70	50 W	ANTHRACITE	6/10kV
330466-39	CLD	8.60	LED-10031lm-530mA-3000K-CRI 70	74 W	ANTHRACITE	6/10kV

#### Accessories



- 504 - Single arm



- 508 - Double arm

#### Posts



- 1508 fluted pole ø120 with base



- 1509 fluted pole ø120



- 1491 poles to be sunk into the ground



- 1481 tapered steel lighting pole to be buried

#### Download

DXF 2D  
- 3277 .dxf

#### 3DS

- disano\_3269\_ministelvio\_16led.3ds  
- disano\_3269\_ministelvio\_32led.3ds  
- disano\_3269\_ministelvio\_48led.3ds

#### 3DM

- disano\_3269\_ministelvio\_48led.3dm  
- disano\_3269\_ministelvio\_32led.3dm  
- disano\_3269\_ministelvio\_16led.3dm

#### Montaggi

- STELVIO-MINISTELVIO.pdf  
- bi-power config.pdf

#### BIM

- 3269 Mini Stelvio FX T5 - light scattering - 20200224.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Posts



- 1480 tapered steel lighting pole with base



- 1493 pole with base



- 1490 Virgola Mast

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The  $W_{tot}$  column indicates the total wattage absorbed by the system without exceeding 10% of the indicated