


## 2886 Saturno - asymmetric 45°

Housing: in die-cast aluminium with cooling fins.  
 Optics: in aluminium coated with very high purity (99.99%) silver using physical vapour deposition (PVD).  
 Diffuser: 5mm thick tempered glass, resistant to thermal shocks and impacts.  
 Coting: powder-coated with graphite grey polyester resin, resistant to corrosion and saline environments.  
 Equipment: complete with mounting bracket and graduated scale goniometer which allows for accurate pointing; external connector for quick installation. Safety insulating switch to cut off power during maintenance. Silicone rubber gasket; external screws and bolts in stainless steel; air recirculation valve. Insulation piercing connector for quick installation with no need to open the fixture. Electronic safety device to protect the LED module and the related ballast compliant with EN 61547. It works in two modes: - differential mode: surge between power cables and between the phase and neutral. - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole. Upon request: protection up to 10KV. Acetic acid salt spray coating pursuant to standard UNI EN ISO 9227 "Corrosion Tests in Artificial Atmosphere". Power factor:  $\geq 0.95$   
 Luminous flux maintenance 80%: 80000h (L80B10).  
 LED 4000K - 700mA - 8640lm - 63W - CRI 70 - Surge protector 6/8Kv  
 LED 4000K - 700mA - 17280lm - 125W - CRI 70 - Surge protector 6/8Kv  
 Wind surface: L:474cm<sup>2</sup> F:1286cm<sup>2</sup>.

### Download

DXF 2D  
- 2886.dxf  
 Montaggi  
- saturno.pdf

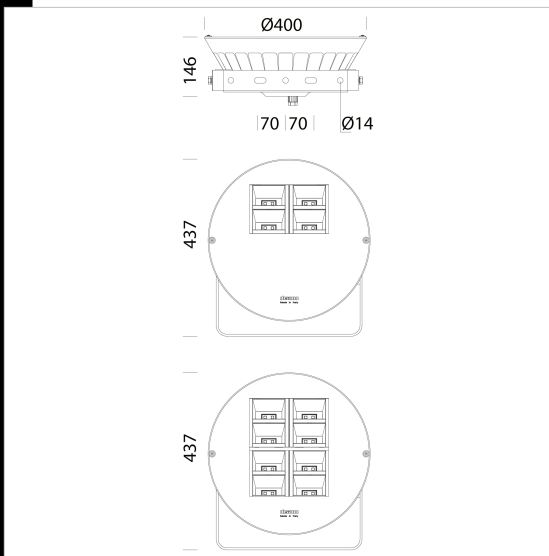

Code	Gear	Kg	Watt	Base	Lamps	Colour
330770-00	CLD CELL	8,76	LED white 63W		8640lm @ 700mA-4000K - 45°-CRI 70	GRAPHITE
330771-00	CLD CELL	9,23	LED white 125W		17280lm @ 700mA-4000K - 45°-CRI 70	GRAPHITE

### Accessories



- 236 76mm pole mounting



- 235 60mm pole mounting