




2889 Saturno - narrow beam

Housing: in die-cast aluminium with cooling fins.
 Optics: made of PMMA with high temperature resistance and UV rays.
 Diffuser: 4mm thick tempered glass, resistant to thermal shocks and impacts.
 Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating. On request: coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments. Equipment: complete with mounting bracket and graduated scale goniometer which allows for accurate pointing; external connector for quick installation. Safety insulating switch to cut off power during maintenance. Silicone rubber gasket; external screws and bolts in stainless steel; air recirculation valve. Electronic safety device to protect the LED module and the related ballast compliant with EN 61547. It works in two modes: - differential mode: surge between power cables and between the phase and neutral. - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole. Upon request: protection up to 10KV. Power factor: ≥ 0.95
 Luminous flux maintenance 80%: 80000h (L80B10).
 Wind surface: L:474cm² F:1286cm².
 Registered Design DM/100271

Download

- DXF 2D
 - 2889h.dxf
- 3DS
 - disano_2889_saturno_72_led.3ds
 - disano_2889_saturno_168_led.3ds
 - disano_2889_saturno_120_led.3ds
- 3DM
 - disano_2889_saturno_72_led.3dm
 - disano_2889_saturno_120_led.3dm
 - disano_2889_saturno_168_led.3dm
- Montaggi
 - saturno prj 07-20.pdf
- BIM
 - 2889 Saturno - narrow beam - 20200611.zip

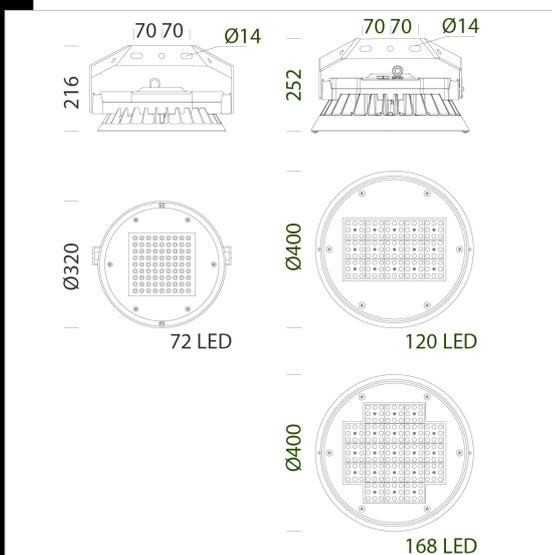

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour	Surge
330870-00	CLD	8.61	LED-8427lm-4000K-CRI 80	67 W	GRAPHITE	6/8kV
330871-00	CLD	8.90	LED-14045lm-4000K-CRI 80	108 W	GRAPHITE	6/8kV
330872-00	CLD	8.87	LED-19664lm-4000K-CRI 80	151 W	GRAPHITE	6/8kV

Accessories



The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated