


## 1109 Quasar

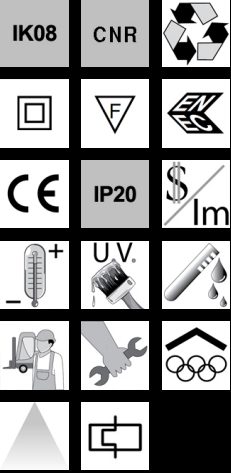

### Download

DXF 2D

- 1109.dxf

Montaggi

- luc\_quasar\_tn03.pdf



Housing: pressed steel.

Reflector: prismatic, pressed, 99.85 anodised aluminium, thickness 3 m, polished for higher luminous efficiency.

Painting: In polyester powder, black, upon chromate treatment, resistant to corrosive and salty environments.

Lampholder: Ceramic, with silver-plated contacts.


Electric gear: 230V/50Hz supply with thermal protection. Silicone wire terminated with quick-connection admiralty brass clamps; silicone insulation with fibreglass braid; cross-section: 1.5 sqmm. 2P+T terminal block (maximum allowed lead cross-section: 4 sqmm)

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP20IK08 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ). They have obtained the ENEC European Certificate of Conformity. Moreover, these products can be installed on normally inflammable surfaces. Double insulation class.

Note: For optimal operation of industrial luminaires supplied without lamp (CNR) we recommend the use of the suitable lamps

1109 Quasar JM-E400 3.25A; 0.6-1.0 KV

1109 Quasar JM-E/SAP-E250 3A; 3.5-4.5KV

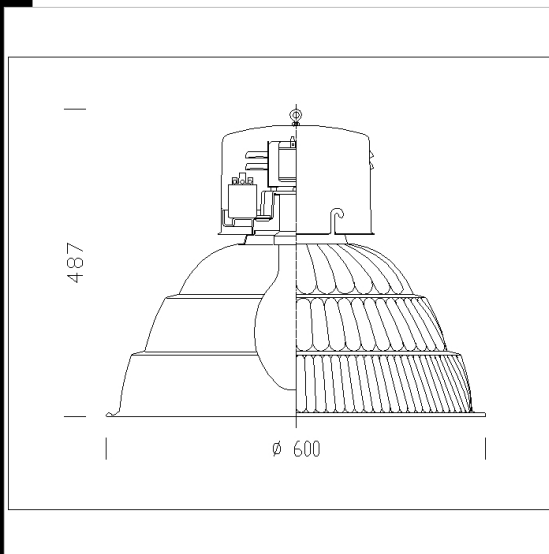

Code	Gear	Kg	Watt	Base	Lamps	Colour
411047-00	CELL	7,60	FLC 120P/E	2G8	--	SANDBLASTED SILVER
411046-00	CNR	10,20	SAP-E 400	E40	54000lm-2000K-Ra 4	GRAPHITE
411043-00	CNR	8,80	JM/SAP-E 250	E40	25000lm-2000K-Ra 4	GRAPHITE
411044-00	CNR	9,70	JM-E 400	E40	32500lm-4500k-Ra 2b	GRAPHITE

### Accessories



- 1160 guard