

Download

DXF 2D

- 1110.dxf

Montaggi

- luc_quasar_in03.pdf



1110 Quasar - with glass

Housing: pressed steel.


Reflector: prismatic, pressed, 99.85 anodised aluminium, thickness 3 m, polished for higher luminous efficiency.

Diffuser: in tempered glass, thermal shock and impact resistant.

Painting: In polyester powder, upon chromate treatment, resistant to corrosive and salty environments. Lampholder: Ceramic, with silver-plated contacts.

Electric gear: 230V/50Hz supply with thermal protection. Silicone wire terminated with quick-connection admiralty brass clamps; silicone insulation with fibreglass braid; cross-section: 1.5 sqmm. 2P+T terminal block (maximum allowed lead cross-section: 4 sqmm)

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP20IK08/547 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ). Moreover, these products can be installed on normally inflammable surfaces. Double insulation class.

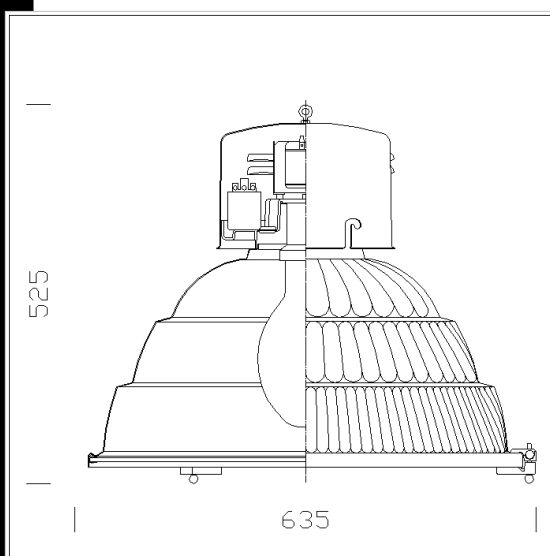

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
411152-00	CNR-L	9.70	CDM-E MW 230-21140lm-4200K-CRI 90	270 W	E40	GRAFITE
411154-00	CNR-L	9.70	CDM-E MW 360-34100lm-4200K-CRI 88	387 W	E40	GRAFITE
411153-00	CNR-L	9.70	SAP-E 250-31200lm-2000K-Ra 4	277 W	E40	GRAFITE
411155-00	CNR-L	9.70	SAP-E 400-54000lm-2000K-Ra 4	436 W	E40	GRAFITE

Accessories



- 1160 guard

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated