

Download

DXF 2D
- 1720_iridio.dxf
Montaggi
- valvola_anticondiridio.dxf
- iridio 1719-20.pdf



1720 Iridio symmetric

Housing/frame: Fibreglass reinforced plastic material.

Hooks: Fibreglass nylon.

Reflector: Symmetric made of anodised, anodised and polished hammered aluminium 99.85.

Diffuser: Tempered glass, 5 mm thick, resistant to impact and thermal shock


Lampholder: Ceramic with silver-plated contacts

Electric gear: 230V-50Hz power supply with heat protection. Wire terminated with admiralty brass clamps, silicone insulation with fibreglass braid; cross section: 1 sqmm. 2P terminal block (maximum allowed lead cross section 4 sqmm.)

Equipment: Silicone rubber gasket. Fibreglass nylon cable gland, Ø ½ " gas. Retained steel screws with special anticorrosion and anti-gripping treatment. Black painted steel bracket with protractor scale. The hinged front frame can be opened without tools, and stays attached to the housing for easy maintenance. Equipped with an air-circulation valve. Knife switch included in standard supply.

Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

Wind surface: 1200 cm².

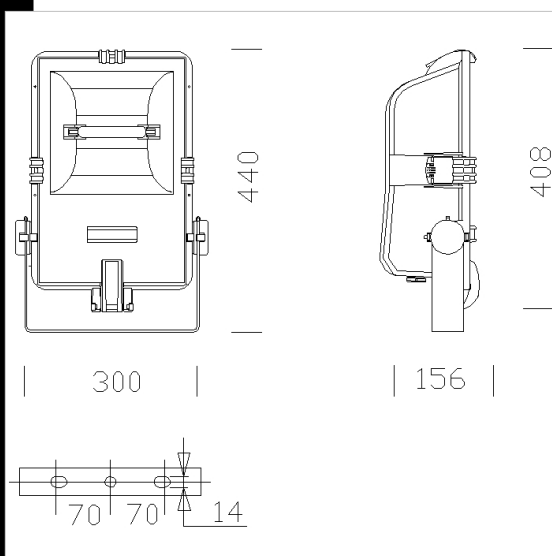

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
411732-00	CNR-L	5.80	JM-TS 150-12500lm-4200K-Ra 1b	157 W	Rx7s	BLACK
411740-00	CNR-L	5.20	JM-TS 70-6500lm-4200K-Ra 1b	91 W	Rx7s	MET. SILVER
411742-00	CNR-L	5.83	JM-TS 150-12500lm-4200K-Ra 1b	157 W	Rx7s	MET. SILVER
411741-00	CNR-L	5.20	SAP-TS 70-6800lm-2000K-Ra 4	82 W	Rx7s	MET. SILVER
411745-00	CNR-L	5.00	SAP-E 70-5600lm-2000K-Ra 4	82 W	E27	MET. SILVER
411730-00	CNR-L	5.19	JM-TS 70-6500lm-4200K-Ra 1b	91 W	Rx7s	BLACK
411735-00	CNR-L	5.00	SAP-E 70-5600lm-2000K-Ra 4	82 W	E27	BLACK
411731-00	CNR-L	5.20	SAP-TS 70-6800lm-2000K-Ra 4	82 W	Rx7s	BLACK
411736-00	CELL	5.40	FLC 1x42T/E-3200lm-4000K-Ra 1b	44 W	Gx24q-4	BLACK
411743-00	CNR-L	5.80	SAP-TS 150-15000lm-2000K-Ra 4	157 W	Rx7s	MET. SILVER
411733-00	CNR-L	5.80	SAP-TS 150-15000lm-2000K-Ra 4	157 W	Rx7s	BLACK

Accessories



- 175 protective guard



- 176 baffle louver

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated