

Download


DXF 2D
- 1156fsi.dxf

3DS
- 1156_forum_fm.3ds

3DM
- 1156 forum fm.3dm

Montaggi

- cabl_f_c.dxf
- cabl_sin.dxf
- acc_.dxf
- press_.dxf
- 1156_orient.dxf
- st_int_.dxf
- 1156-1186.pdf

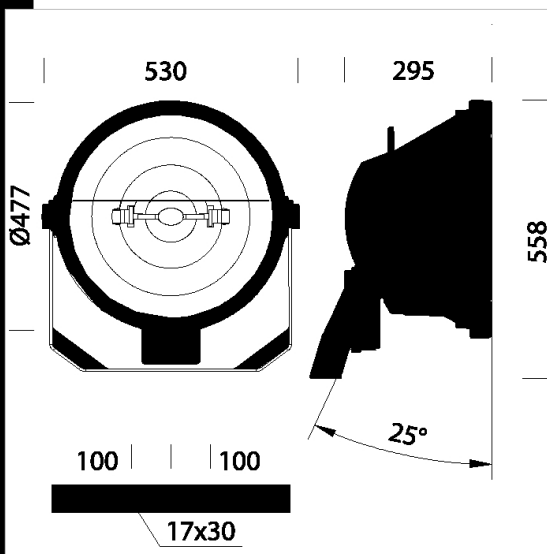

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
412571-00	S	12.81	MAX-TS 1000 FM-90000lm-6100k-Ra 1a	1006 W	by wire	GRAPHITE
412574-00	S	12.71	MAX-TS 2000 FM-200000lm-6100k-Ra 1a	1954 W	by wire	GRAPHITE

Accessori



- 111 Protective guard



- 112 conveyor



- 113 baffle louvre



- 1177 D.C.electric gear- IP65



- 163 steel pole unit



- 1176 D.C.electric gear - ip66

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated