


1156 Forum - XL indoor


Housing/frame: In die-cast aluminium, with cooling fins.
 Reflector: In 99.98 aluminium, anodized and polished, with fin for recovery of unused light.
 Diffuser: Tempered glass, 5 mm thick, resistant to thermal shocks and impacts. (UNI7142 tests, 3193 British standard).
 Painting: With polyester powder, colour graphite, resistant to corrosive and saline environments.
 Lampholder: In ceramics with silver-plated contacts. Cable socket.
 Electric gear: 230V/50Hz (1000W) 400V/50Hz (2000W) power supply. Silicone wire terminated with clamps in admiralty brass, with fiberglass braid, 2.5 sqmm cross section. Nylon 2P+T terminal block with maximum allowed lead cross section of 6 sqmm.
 Equipment: Cable gland in f.g. nylon Ø 1/2 gas thread. Protective device: when the back cover is opened (hinge opening), the normally closed contact opens and cuts off supply to the fixture. Aiming visor. Anticondensation filter. Standard igniter placed in a special box.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP66IK08 degree of protection according to EN 60529 standards. They have obtained the ENEC European Certificate of Conformity.
 Additional gear: Hot restrrike
 Lamp: MAX-TS1000; MAX-TS2000.
 Wind surface: L:1400cm² F:2000cm².
 Hot restart with -99 subcode.

Download
 DXF 2D
 - 1156xlindoor.dxf
 Montaggi
 - 1156-1186.pdf

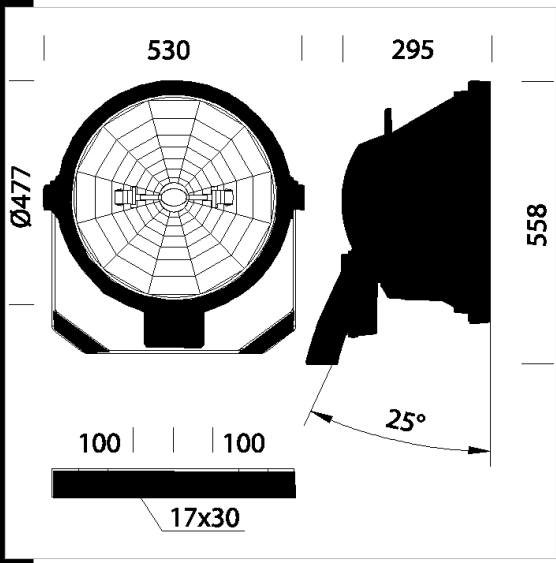

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
412581-00	S	12,25	MAX-TS 1000 SA---	1060 W	by wire	GRAPHITE
412580-00	S	12,81	MAX-TS 2000 SA---	2085 W	by wire	GRAPHITE

Accessori

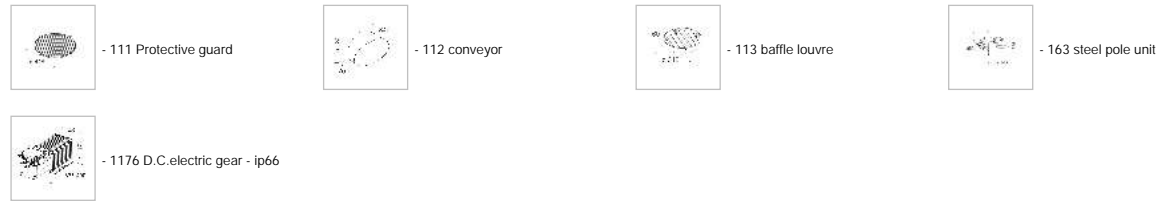

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated