


1167 Radon

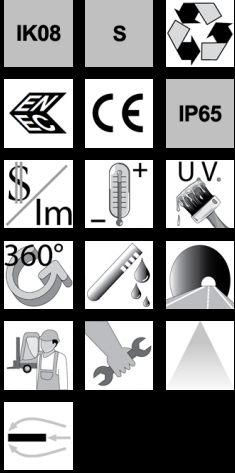


Housing: In extruded aluminium with die-cast end caps and wide cooling fins. Reflector: In high-gloss 99.85 anodized aluminium, 3µ thick. Diffuser: Tempered silk-screen printed glass, 4 mm thick, thermal shock and impact resistant. Coating: On end caps and hooks, by a multistage process. Stage 1: black epoxy cationic electrocoating, applied, resistant to corrosion and briny mist. Stage 2: UV-stabilising priming. Stage 3: rough sandblasted metal silver acrylic finishing. Lampholder: In ceramics, with silver-plated contacts. Socket E40. Electric gear: 230V/50Hz. Silicone wire terminated with admiralty brass clamps; fibreglass braid insulation - cross-section: 1 sqmm (up to 400W) or 2.5 sqmm (400 to 1000W). 2P+T terminal block (maximum allowed lead cross-section: 4 sqmm). Standard supply: The hinge-opening frame remains hooked to the fixture for easy maintenance. The reflector, which is screwed in place, remains attached to the housing by means of nylon safety cords. Removable gear tray. Equipment: Complete with air re-circulation valve. Gasket in environment-friendly silicone rubber resistant to 280°C. Cable gland in f.g. nylon, Ø 1/2 gas thread (cable min Ø 9, max Ø 12). Catches in aluminium, screws in stainless steel. Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. Lamps: JM/SAP-T1000. Wind surface: 1860 cmq.

Download

DXF 2D  
- d1167\_1.dxf

Montaggi  
- valvola.dxf  
- 1165-66-67\_radon\_tn.pdf  
- 91.dxf  
- 92.dxf

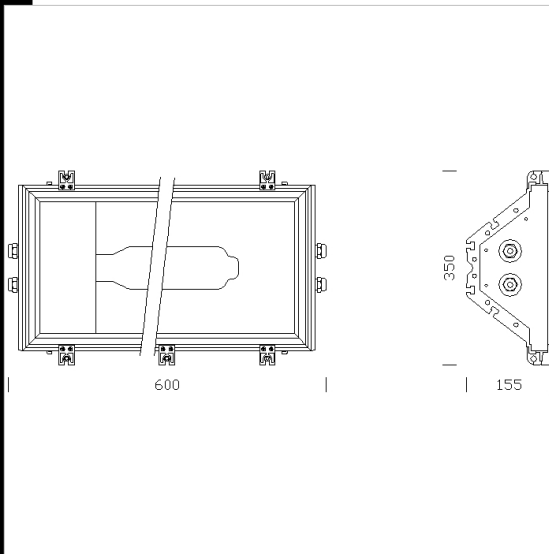

Code	Gear	Kg	Watt	Base	Lamps	Colour
413354-00	S	28,80	JM/SAP-T 1000	E40	130000lm-2000K-Ra 4	MET. SILVER

Accessori



- 91 fixed mounting bracket



- 92 pivoting mounting bracket



- 1177 D.C. electric gear- IP65