


1130 Punto



HOUSING: in die-cast aluminium with cooling fins.
 REFLECTOR: in pre-anodised and hammered 99.85 aluminium for versions Max 500 and TS.
 DIFFUSER: tempered glass, 5 mm thick, resistant to thermal shock and impacts (UNI EN 12150-1:2001 tests).
 COATING: powder-coated with polyester resin in silver/black colour, resistant to corrosion and saline environments.
 LAMP HOLDER: in ceramic and silvered contacts.
 WIRING: electronic ballast 220V/240 50-60Hz for the versions with discharge lamps. Direct power supply 220/240V 50-60Hz for Max.500W. Wiring with flexible silicone cable. 2P+T terminal board with maximum allowable conductor cross-section of 2.5 mm².
 STANDARD SUPPLY: complete with galvanised and coated bracket.
 EQUIPMENT: during maintenance or lamp replacement, special safety rings keep the glass hooked to the housing.
 REGULATORY STANDARD: manufactured pursuant to EN 60598 and a degree of protection IP65IK08 pursuant to EN 60529 tested after a 7 day accelerated ageing. They have class of insulation I.
 Wind surface: 300 cm².

Download

DXF 2D
- 1130d.dxf

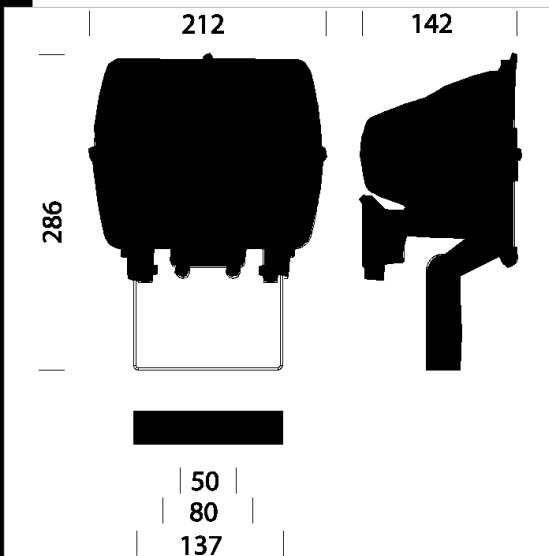

Code	Gear	Kg	Watt	Base	Lamps	Colour
413613-00	S	1,36	MAX 500	R7s	--	SANDBLASTED SILVER
413610-00	S	1,40	MAX 500	R7s	--	GRAPHITE