

Download

DXF 2D
- 1155n.dxf
Montaggi
- indio.pdf



1151 Indio - LED asymmetric

Housing/frame: In die-cast aluminium with wide cooling fins.

Optics: in PMMA, highly resistant to temperature and UV radiation

Diffuser: Tempered glass, 5 mm thick, thermal shock and impact resistant. (UNI7142 tests British standard 3193).

Painting: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.

Equipment: Gasket in silicone rubber material. Retained steel screws with special anticorrosion and anti-gripping treatment. Bracket with protractor scale. The hinge-opening front frame stays hooked to the fixture housing.


Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP66IK08 degree of protection according to EN 60529 standards.

Wind surface: 1970 sqcm.

Ta-30 + 40°C Luminous flux maintenance 80% 80.000h L80B20

Photobiological risk: exempt, pursuant to EN62471.

Power factor: 0.9.

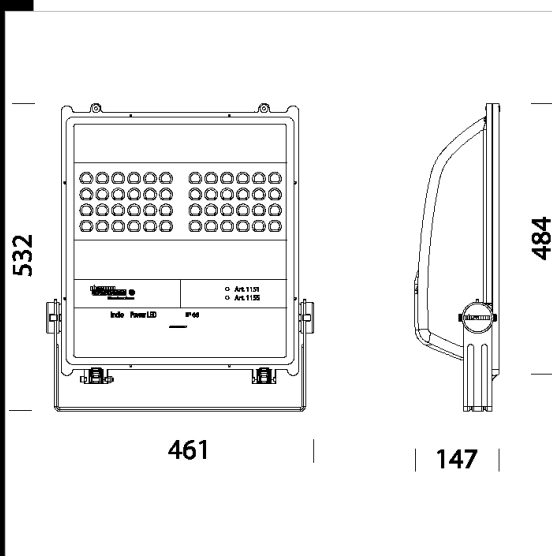

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
413821-00	CLD CELL	11.04	LED-10592lm-700mA-4000K-CRI>70	101 W	GRAPHITE

Accessories



- 71 baffle louvre



- 73 protective guard



- 333 pole mounting diam.60



- 334 pole mounting diam. 76



- 42 adjustable arm



- 164 pole bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated