

## 1768 Sicura - FS symmetric LED

The excellent performance of this spotlight in terms of energy-saving and light efficiency come with a long life (60,000 hours) and it is made in IP66 material especially conceived for outdoor installation. An all-round product that will meet all the needs of modern lighting design.

Housing: complete with graphite aluminium frame with die-cast aluminium end caps.

Diffuser: 8 mm and tempered glass, resistant to thermal shock.

Optics: system made in high performance PMMA, resistant to high temperatures and UV radiation. Flux recovery system in polycarbonate.

Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.

Equipment: complete with IP68 airtight connector for mains connection.

Ta-30 +40°C

Luminous flux maintenance 80%: 50000h (L80B20)


Power factor: 0.9.

Photobiological safety class: exempt group

### download

DXF 2D  
- 1768x.dxf

Montaggi  
- sicura2018.pdf

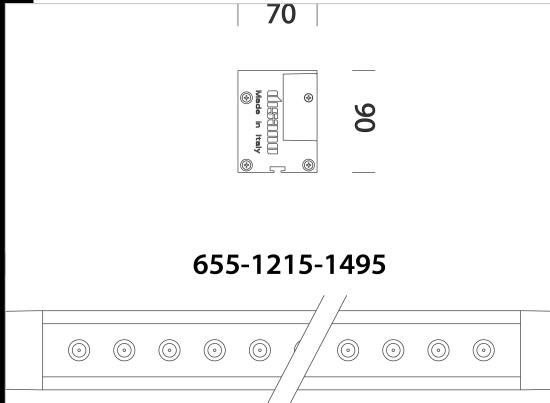

catalogo.codice	catalogo.cablaggio	kg	catalogo.watt	catalogo.attacco	catalogo.lampade	catalogo.colore
414242-00	CLD CELL	2.89	LED		2931lm-4000K-30°-CRI80	GREY
414243-00	CLD CELL	5.54	LED		5865lm-4000K-30°-CRI80	GREY
414244-00	CLD CELL	6.56	LED		7329lm-4000K-30°-CRI80	GREY

### catalogo.accessori



- 376 ceiling mount



- 535 adjustable bracket



- 536 Wall mounting



- 339 connector



- 537 adjustable bracket