



1748 Sicura - wide beam LED

Sicura is a linear lighting wall washer with a robust aluminium housing. The product suits perfectly for highlighting outdoor and indoor applications offering powerful and efficient wall washing effects and providing a high environmental protection grade IP67.

Sicura is available also a wide range of beam angles and mounting options are available.


Housing: extruded aluminium suitable for continuous row
Diffuser: tempered shock, resis tant to impacts, thermal shocks and loads (max 2000 kg) 8 mm thick glass.

Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.

Equipment: complete with electrical cable
On request: with IP68 airtight connector for mains connection.

Luminous flux maintenance 80% 50000h (L80B20)
Power factor >0.9

Photobiological safety class: exempt group
Allowable ambient temperature -30°C to + 40°C

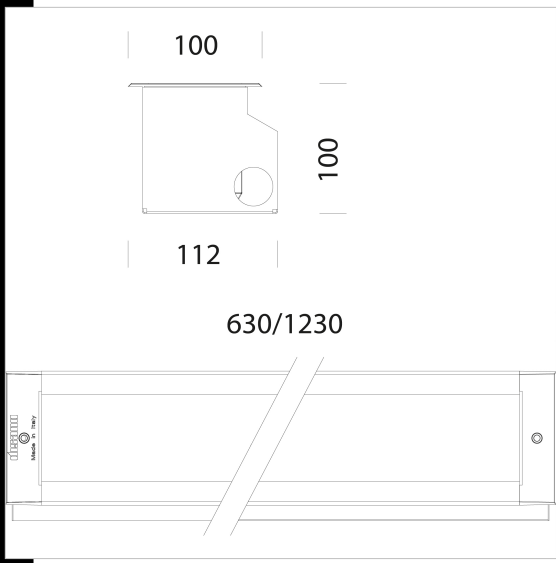

Download
DXF 2D
- 1748f.dxf
Montaggi
- sicura rec.pdf
BIM
- 1748 Sicura - wide beam LED - 20200604.zip

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
414252-00	CLD	3.86	LED-899lm-4000K-CRI 80	14 W	GREY
414259-00	CLD	7.48	LED-3261lm-4000K-CRI 80	48 W	GREY
414258-00	CLD	7.32	LED-1576lm-4000K-CRI 80	24 W	GREY
414254-00	CLD	3.94	LED-1800lm-4000K-CRI 80	28 W	GREY

Accessories



The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated