



Download

- DXF 2D
- 1838f.dxf
- Montaggi
- sicura rec.pdf
- BIM
- 1836 Sicura - FS symmetric LED - 20200604.zip



1836 Sicura - FS symmetric LED

Sicura is a linear lighting wall washer with a robust aluminium housing. The product suits perfectly for highlighting outdoor and indoor applications offering powerful and efficient wall washing effects and providing a high environmental protection grade IP67.

Sicura is available also a wide range of beam angles and mounting options are available.

Housing: extruded aluminium suitable for continuous row

Diffuser: tempered shock, resis tant to impacts, thermal shocks and loads (max 2000 kg) 8 mm thick glass.

Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.

Equipment: complete with electrical cable


On request: with IP68 airtight connector for mains connection.

Luminous flux maintenance 80%: 50000h (L80B20)

Power factor >0.9

Photobiological safety class: exempt group

Allowable ambient temperature -30°C to + 40°C

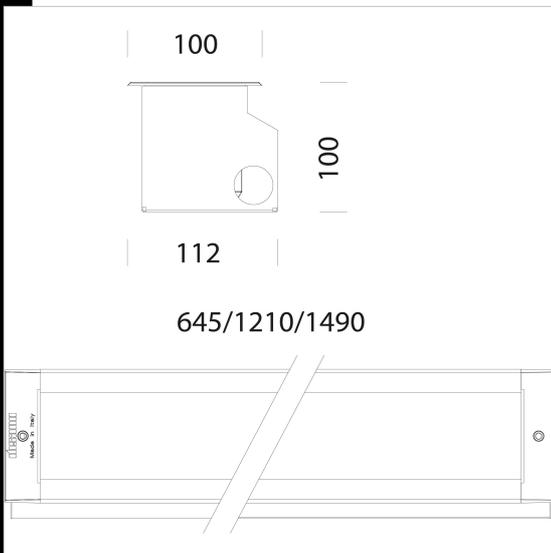

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
414260-00	CLD	4.32	LED-2952lm-4000K-CRI80	22 W	GREY
414261-00	CLD	8.26	LED-5905lm-4000K-CRI80	43 W	GREY
414268-00	CLD	10.16	LED-7381lm-4000K-CRI80	54 W	GREY

Accessories



- 905 bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated