


Download

DXF 2D
- 1740t.dxf



1740 Sicura inox - symmetric

Housing: extruded aluminium suitable for continuous row
Diffuser: tempered shock, resis tant to impacts, thermal shocks and loads (max 2000 kg) 8 mm thick glass.
On request: with IP68 airtight connector for mains connection.

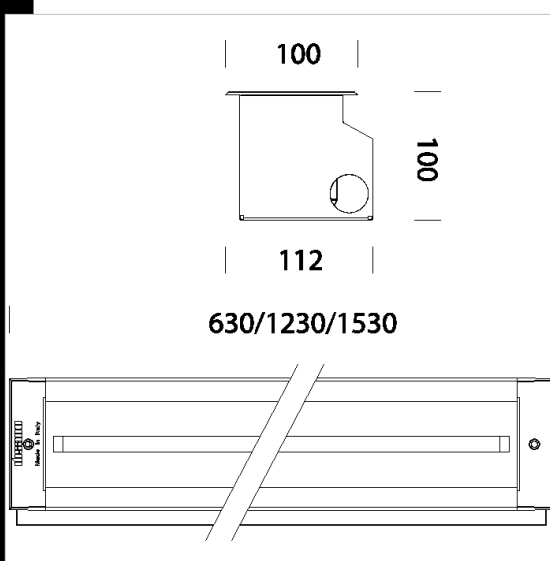

| Code | Gear | Kg | Lumen-K-CRI | WTot | Base | Colour |
|-----------|------|------|----------------------------|------|------|--------|
| 414286-00 | CELL | 8.95 | FL 1x49-4350lm-4000K-Ra 1b | 55 W | G5 | GREY |
| 414285-00 | CELL | 7.35 | FL 1x54-4450lm-4000K-Ra 1b | 59 W | G5 | GREY |
| 414284-00 | CELL | 3.75 | FL 1x24-1750lm-4000K-Ra 1b | 29 W | G5 | GREY |

Accessories



- 905 bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated