

1726 Sicura - symmetric T5

Housing: complete with graphite aluminium frame with die-cast aluminium end caps.

Diffuser: 8 mm transparent tempered glass, resistant to thermal shock.

Coating: housing oxide and caps in polyester resin for powder coating, resistant to corrosion and saline environments.


Equipment: complete with IP68 airtight connector for mains connection.

Download

DXF 2D
- 1726t.dxf

3DS
- disano_1726_sicura_1540.3ds
- disano_1726_sicura_640.3ds
- disano_1726_sicura_1240.3ds

3DM
- disano_1726_sicura_640.3dm
- disano_1726_sicura_1240.3dm
- disano_1726_sicura_1540.3dm

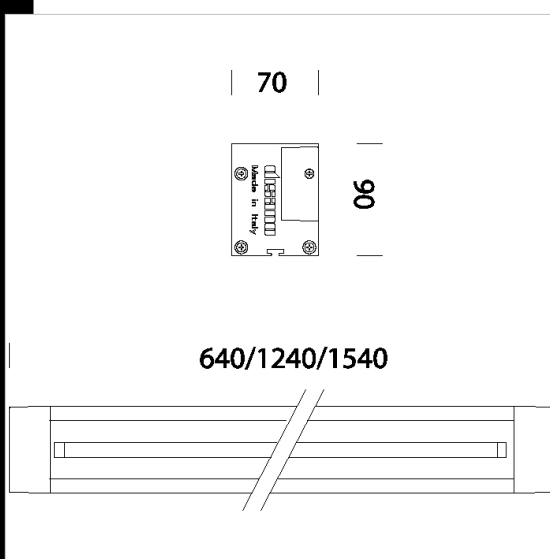

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
414290-00	CELL	1.91	FL 1x24-1750lm-4000K-Ra 1b	29 W	G5	GREY
414291-00	CELL	3.91	FL 1x54-4460lm-4000K-Ra 1b	59 W	G5	GREY
414292-00	CELL	5.21	FL 1x49-4350lm-4000K-Ra 1b	55 W	G5	GREY

Accessories



- 537 adjustable bracket



- 536 Wall mounting



- 535 adjustable bracket



- 376 ceiling mount

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated