


**Download**

DXF 2D  
- 1833.dxf  
Montaggi  
- 1833-34.pdf

**1833 Rodio - Concentrate**



Housing without frame: Die-cast aluminium with cooling fins.  
Diffuser: Tempered glass 5 mm thick, resistant to impact and thermal shock (UNI EN 12150-1:2001 tests).  
Coating: Graphite grey polyester powder coating applied, resistant to corrosive and saline environments.  
Lampholder: Ceramic with silver-plated contacts  
Electric gear: 230V/50HzHz power supply with heat protection. Flexible wire terminated with admiralty brass clamps, fibreglass braid insulation, cross section: 1sqmm. 2P+T terminal block (maximum allowed lead cross-section: 4sqmm).  
Equipment: Silicone rubber gasket. Fibreglass nylon cable gland, Ø 1/2 " &quot; gas. Ø 1/2inch gas. Corrosion and gripping resistant retained stainless steel screws. Steel bracket with protractor scale. The front frame opens on hinges (no tools required) and stays attached to the fixture housing. Equipped with air circulation valve. Supplied with knife switch. Latches with safety screw.  
Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

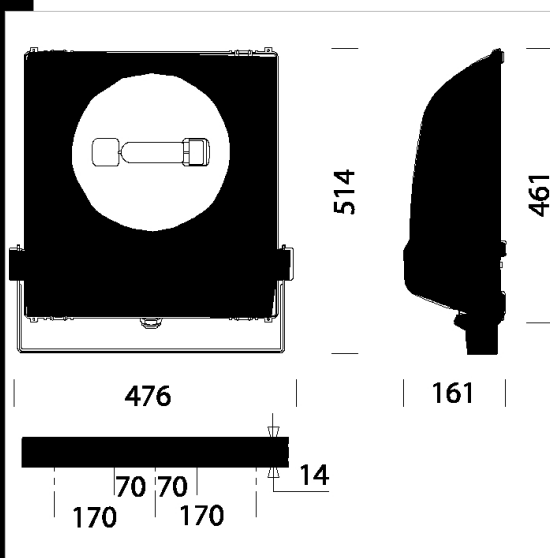

Code	Gear	Kg	Watt	Base	Lamps	Colour
414730-00	CNR-L	11,39	HCI-TM 250	G22	26000lm-3000K-Ra 92	GRAPHITE
414731-00	CNR-L	12,71	HCI-TM 400	G22	41000lm-3000K-Ra 94	GRAPHITE

**Accessories**



- 333 Attack pole diam. 60



- 334 Attack pole diam. 76



- 351 guard



- 348 baffle louvre