



Download

DXF 2D
- 1897b.dxf

Montaggi
- rodio hp 07-20.pdf

BIM
- 1897 Rodio HP - COB symmetric -
20200528.zip



1897 Rodio HP - COB symmetric

Housing: in die-cast aluminium with cooling fins.

Reflector: symmetric in pressed prismatic aluminium, anodised and polished for higher luminous efficiency.

Diffuser: 5mm thick tempered glass, resistant to thermal shocks and impacts.


Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.

On request, coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments. 2200K - AMBER (sub-code -73)

Equipment: external connector for quick installation. Silicone rubber gasket; external screws and bolts in stainless steel; air recirculation valve. Power factor: 0,9.

Photobiological risk: exempt, pursuant to EN62471.

Low flicker Luminous flux maintenance 80%: 50.000h (L80B20). Wind surface: L:455cm² F:1529cm².

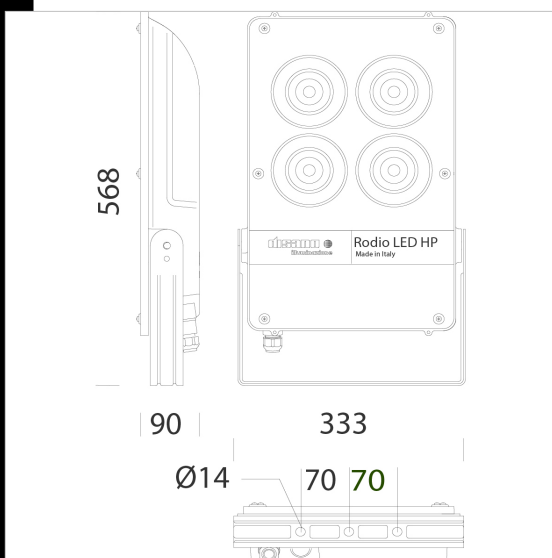

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
414825-00	CLD CELL	7.48	LED-31640lm-4000K-CRI 80	246 W	GRAPHITE
414825-39	CLD CELL	7.67	LED-29425lm-3000K-CRI 80	246 W	GRAPHITE
414826-00	CLD CELL	8.85	LED-41110lm-4000K-CRI 80	318 W	GRAPHITE
414826-39	CLD CELL	8.85	LED-38232lm-3000K-CRI 80	318 W	GRAPHITE
414825-22	CLD CELL	7.56	LED--4000K-FS-CRI 80	246 W	GRAPHITE
414825-3922	CLD CELL	7.60	LED--3000K-FS-CRI 80	246 W	GRAPHITE
414825-2228	CLD CELL	7.60	LED--3000K-FS-CRI 80	246 W	GRAPHITE
414826-22	CLD CELL	8.72	LED--4000K-FS-CRI 80	318 W	GRAPHITE
414826-3922	CLD CELL	9.27	LED--3000K-FS-CRI 80	318 W	WHITE
414826-2228	CLD CELL	9.22	LED--3000K-FS-CRI 80	318 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated