


Download
DXF 2D
- 1987w.dxf
3DS
- disano_1987_minirodio.3ds
3DM
- disano_1987_minirodio.3dm
Montaggi
- MINIRODIO.pdf
BIM
- 1987 Mini Rodio - asymmetric - 20200528.zip

1987 Mini Rodio - asymmetric



Housing: in die-cast aluminium with cooling fins.
Reflector: in PMMA, highly resistant to temperature and UV radiation.
Diffuser: 4mm thick tempered glass, resistant to thermal shocks and impacts.
Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.
Equipment: complete with electrical cable for mains connection L=0,6m. Silicone rubber gasket; external screws and bolts in stainless steel; Electronic safety device to protect the LED module and the related ballast compliant with EN 61547. It works in two modes: - differential mode: surge between power cables and between the phase and neutral. - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole. Upon request: protection up to 10KV. Coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments. Power factor: ≥ 0.9
Luminous flux maintenance 80%: 80000h (L80B20)
Wind surface: L:242cm² F:807cm².

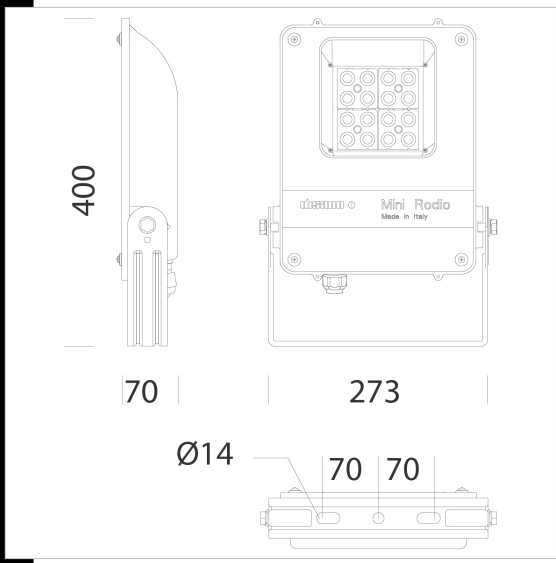

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour	Surge
414910-00	CLD	3.71	LED-6606lm-4000K-CRI 80	54 W	GRAPHITE	6/8kV
414911-00	CLD	3.71	LED-8122lm-4000K-CRI 80	73 W	GRAPHITE	6/8kV

Accessories



- 333 pole mounting diam.60



- 334 pole mounting diam. 76

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated