


## 1898 Rodio HP - COB asymmetric



Housing: in die-cast aluminium with cooling fins.  
 Reflector: in high-grade 99,99 aluminium with PVD treatment.  
 Diffuser: 5mm thick tempered glass, resistant to thermal shocks and impacts.  
 Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.  
 On request, coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments. 2200K - AMBER (sub-code -73)  
 Equipment: external connector for quick installation. Silicone rubber gasket; external screws and bolts in stainless steel; air recirculation valve.  
 Power factor: 0,9.  
 Photobiological risk: exempt, pursuant to EN62471.  
 Low flicker Luminous flux maintenance 80%: 50.000h (L80B20). Wind surface: L:455cm<sup>2</sup> F:1529cm<sup>2</sup>.

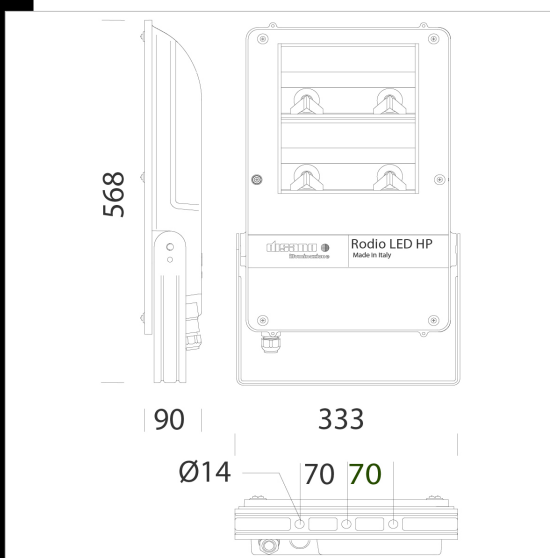

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
414925-00	CLD	7,56	LED-30277lm-4000K-CRI 80	246 W	GRAPHITE
414925-39	CLD	7,58	LED-28157lm-3000K-CRI 80	246 W	GRAPHITE
414926-00	CLD	8,94	LED-40586lm-4000K-CRI 80	318 W	GRAPHITE
414926-39	CLD	8,88	LED-37745lm-3000K-CRI 80	318 W	GRAPHITE
414927-00	CLD	9,26	LED-44645lm-4000K-CRI 70	318 W	GRAPHITE



### Download

- DXF 2D  
- 1898b.dxf
- Montaggi  
- rodio hp 07-20.pdf
- BIM  
- 1898 Rodio HP - COB asymmetric - 20200528.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated