

Download

DXF 2D
- 1827-30.dxf

3DS
- disano_1830_mini_olympic.3ds

3DM
- disano_1830_mini_olympic.3dm

Montaggi
- 1826_7_8_9_30_31_1000w_cl1.pdf
- miniolympic_montaggio.dxf



1830 Mini-Olympic - asymmetric - narrow beam LA

Housing/Cover: in die-cast aluminium with cooling fins. Hinge opening, with stainless steel sealing latches.

Diffuser: tempered glass, 5 mm thick, resistant to thermal shocks and impacts (UNI EN 12150-1:2001 tests). Glass tilted by 18° to obtain high optical asymmetry efficiency and maximum intensity.

Coating: polyester resin based powder paint, resistant to corrosion and saline environments.


Power supply: 230V/50Hz (1000W). Wire terminated with admiralty brass clamps, silicone insulation with fibreglass braid, cross-section 2.5 sqmm. 2P+T terminal block, maximum allowed lead cross section, 6 sqmm.

Standard supply: tool-free maintenance operations. Disconnecting switch supplied to interrupt the line during maintenance.

Equipment: silicone rubber gasket. ½ Gas nylon cable gland. Galvanized steel bracket, coated with goniometric scale. Stainless steel external screws. Air recycle valve.

Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

Wind surface: L:1000cm² F:2200cm².

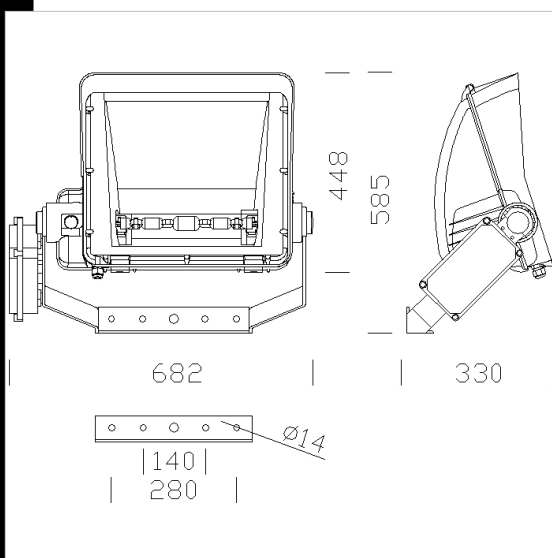

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
415270-99	CNR	27.42	MAX-TS 1000 LA---	0 W	by wire	GREY/GRAFITE
415270-00	S	14.50	MAX-TS 1000 LA---	0 W	by wire	GREY/GRAFITE

Accessories



- 59 pole bracket



- 60 pole bracket



- 333 pole mounting diam.60



- 334 pole mounting diam. 76



- 1176 D.C.electric gear - ip66



- 475 protective guard



- 476 baffle louvre

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated