

1279 Onda LED

Housing/Frame: in die-cast aluminium.

Diffuser: tempered glass, 8 mm thick, resistant to impact and thermal shock.

Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.


Standard supply: when changing the lamp, the frame remains attached to the fixture through steel safety straps.

Ta-20+40°C life 80%: 80.000h (L80B20).

Power factor 0.9.

Photobiological safety class: exempt group EN62471.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

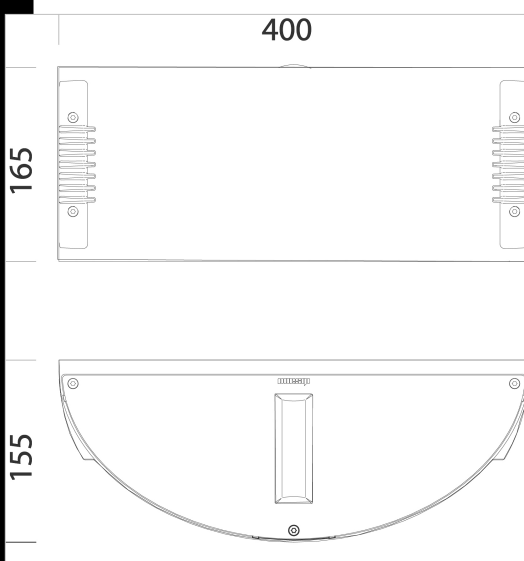

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
420322-00	CLD	3,90	LED 2.2w + 13.2W white-800lm-4000K -CRI 1b	17 W	WHITE
420322-2191	CLD CELL	3,76	LED 2.2w + 13.2W white-800lm-4000K -CRI 1b	16 W	CORTEN
420324-00	CLD	3,90	LED 2.2w + 13.2W white-800lm-4000K -CRI 1b	17 W	GREY9007
420325-00	CLD	3,92	LED 2.2w + 13.2W white-800lm-4000K -CRI 1b	17 W	GRAPHITE



Download

DXF 2D

- 1279.dxf

3DS

- disano_1279_onda.3ds

3DM

- disano_1279_onda.3dm

Montaggi

- onda 01-21.pdf

BIM

- 1279 Onda LED - 20200611.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated