



Download

DXF 2D
- 1296.dxf

3DS
- disano_1296_onda.3ds

3DM
- disano_1296_onda.3dm

Montaggi
- onda.pdf



1296 Onda 2 - direct or indirect light with lens

Housing/Frame: in die-cast aluminium.


Diffuser: tempered glass, 8 mm thick, resistant to impact and thermal shock.

Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Electric gear: 230V/50Hz power supply with heat protection.

Standard supply: when changing the lamp, the frame remains attached to the fixture through steel safety straps.

Reflector: hammered 99.85 aluminium, anodically oxidised and polished. With glass lens to create lighting effects.

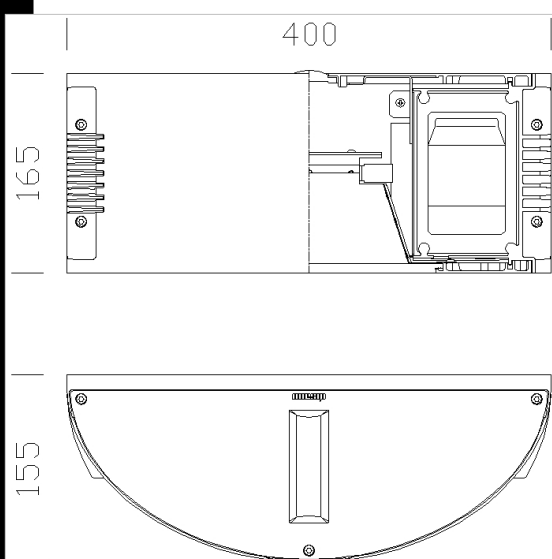

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
420330-00	CNR-L	5.40	JM-TS 70-6500lm-4200K-Ra 1b	92 W	Rx7s	GREY9007
420334-00	CNR-L	5.40	JM-TS 70-6500lm-4200K-Ra 1b	92 W	Rx7s	WHITE
420336-00	CNR-L	5.40	HCI-TS 70-6900lm-3000K-Ra 1b	85 W	Rx7s	WHITE
420337-00	CNR-L	6.44	HCI-TS 150-14500lm-3000K-Ra 1b	160 W	Rx7s	WHITE
420332-00	CNR-L	5.40	HCI-TS 70-6900lm-3000K-Ra 1b	85 W	Rx7s	GREY9007
420333-00	CNR-L	6.44	HCI-TS 150-14500lm-3000K-Ra 1b	160 W	Rx7s	GREY9007
420335-00	CNR-L	6.44	JM-TS 150-12500lm-4200K-Ra 1b	166 W	Rx7s	WHITE
420331-00	CNR-L	6.44	JM-TS 150-12500lm-4200K-Ra 1b	166 W	Rx7s	GREY9007

Accessories



- 500 Onda bracket



- 501 Onda bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated