


1288 Cilindro LED RGB

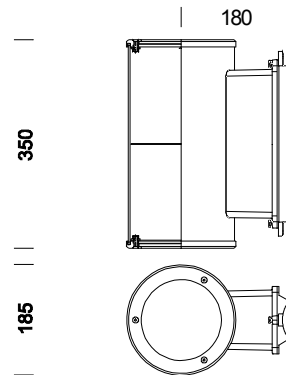

Code	Gear	Kg	Colour	Dimensions	lamp
420411-00	CLD CTL	6.90	al. track	280x185x350	LED 3.3W RGB-R=40lm G=90lm B=30lm-40°
420411-2191	CLD CTL	6.90	corten	280x185x350	LED 3.3W RGB-R=40lm G=90lm B=30lm-40°

Based on the accurate analysis of every minute detail, Cilindro is characterized by excellent finishes and light output.

Its modular use highlights empty spaces and volumes, external architectural details, and adds rhythm to the surfaces in prestigious interiors

Housing: Die cast aluminium.

Diffuser: 4 mm thick toughened glass, withstands thermal shocks and impacts.

Painting: In various phases. The first phase involves immersion in grey epoxy cataphoresis, withstands corrosion and salt mists. The second phase applies an undercoat to stabilise against UV rays and the last phase provides a pressed metal finish using silver acrylic paint.

Standards: Products in compliance with EN60598 - CEI 34 - 21 standards. With protection in accordance with EN60529 standards.

Complete with power supply constant current 350mA.

Complete with 2 modules at the top and 2 modules PowerLed at the bottom. 40°

Upon request, version equipped with DMX wiring. Supplied with 1 module and power supply, Master and receiver