



Download

DXF 2D
- 1292.dxf

3DS
- disano_1292_cilindro.3ds

3DM
- disano_1292_cilindro.3dm

Montaggi
- cilindro.pdf



1292 Cilindro - direct light

Housing: Die cast aluminium.

Diffuser: 4 mm thick toughened glass, withstands thermal shocks and impacts.

Reflector: moulded, polished aluminium, anodically oxidised aluminium and anti-glare concentrating reeds


Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Lampholder: In ceramic material and silver-plated contacts.

Wiring: 230V/50Hz power supply with heat protection. Flexible cable, terminated with quick connector, tin-plated brass tips, Silicon insulation with glass braid. 3P terminal strip with 4 mm² maximum permitted cross-section of conductors.

Standards: Products in compliance with EN60598 - CEI 34 - 21 standards.

With protection in accordance with EN60529 standards.

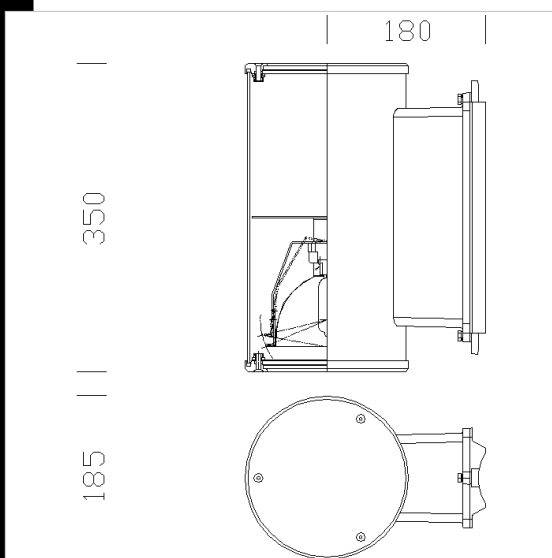

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
420434-00	CELL	7.00	FLC 1x26T/E-1800lm-3000K-Ra 1b	27 W	Gx24q-3	GREY9007
420433-00	CNR-L	7.00	CDM-T 150-14000lm-3000K-Ra 1b	169 W	G12	GREY9007
420432-00	CNR-L	7.00	CDM-T 70-6600lm-3000K-Ra 1b	82 W	G12	GREY9007

Accessories



- 401 wall mounting



- 389 Pegaso wall mounted



- 388 double Pegaso



- 387 single Pegaso

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated