




Download

DXF 2D
- 1294.dxf

3DS
- disano_1294_cilindro.3ds

3DM
- disano_1294_cilindro.3dm

Montaggi
- Cilindro_06_17.pdf
- 1294.pdf

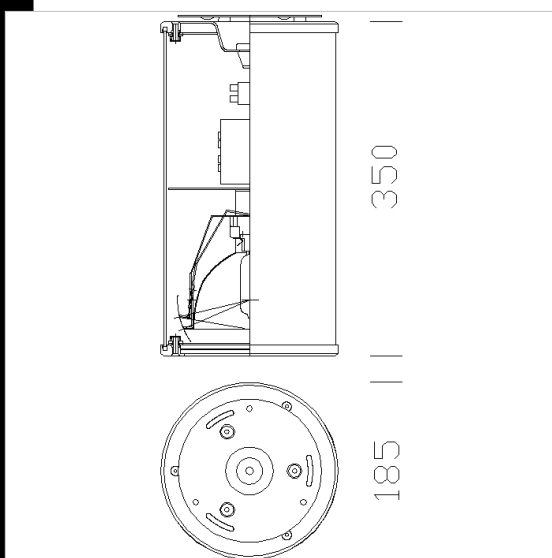

1294 Cilindro

Housing: Die cast aluminium.

Diffuser: 4 mm thick toughened glass, withstands thermal shocks and impacts.
Reflector: moulded, polished aluminium, or turned, anodically oxidised aluminium. Adjustable in direct light version.

Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Lampholder: In ceramic material and silver-plated contacts.

Wiring: 230V/50Hz power supply with heat protection. Flexible cable, terminated with quick connector, tin-plated brass tips, Silicon insulation with glass braid. 3P terminal strip with 4 mm² maximum permitted cross-section of conductors.

Standards: Products in compliance with EN60598 - CEI 34 - 21 standards.
With protection in accordance with EN60529 standards.

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
420460-00	CNR-L	3.80	CDM-T 35-3500lm-3000K-Ra 1b	42 W	G12	GREY9007
420461-00	CNR-L	4.80	CDM-T 70-6600lm-3000K-Ra 1b	82 W	G12	GREY9007
420462-00	CELL	3.80	FLC 1x26T/E-1800lm-4000K-Ra 1b	27 W	Gx24q-3	GREY9007

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated