




Download

- DXF 2D
- 1299.dxf
- 3DS
- disano_1299_cilindro.3ds
- 3DM
- disano_1299_cilindro.3dm
- Montaggi
- Cilindro_06_17.pdf



1299 Cilindro

Housing: Die cast aluminium.
 Diffuser: 4 mm thick toughened glass, withstands thermal shocks and impacts.
 Reflector: moulded, polished aluminium, or turned, anodically oxidised aluminium. Adjustable in direct light version.
 Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
 Lampholder: In ceramic material and silver-plated contacts.
 Wiring: 230V/50Hz power supply with heat protection. Flexible cable, terminated with quick connector, tin-plated brass tips, Silicon insulation with glass braid. 3P terminal strip with 4 mm² maximum permitted cross-section of conductors.
 Standards: Products in compliance with EN60598 - CEI 34 - 21 standards. With protection in accordance with EN60529 standards.

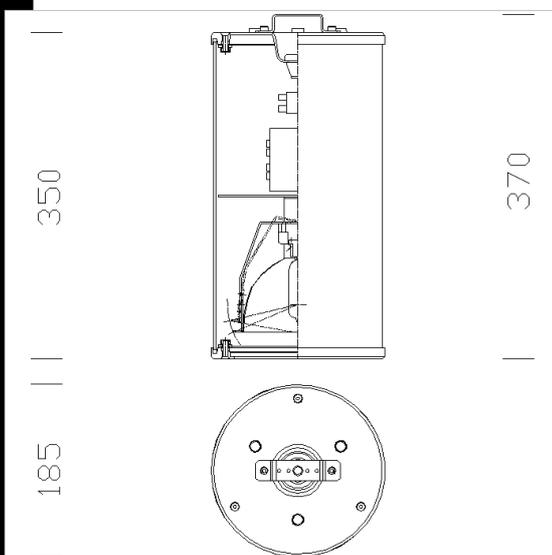

| Code | Gear | Kg | Lumen-K-CRI | WTot | Base | Colour |
|-----------|-------|------|--------------------------------|------|---------|----------|
| 420470-00 | CNR-L | 4.80 | CDM-T 35-3500lm-3000K-Ra 1b | 42 W | G12 | GREY9007 |
| 420471-00 | CNR-L | 4.80 | CDM-T 70-6600lm-3000K-Ra 1b | 82 W | G12 | GREY9007 |
| 420472-00 | CELL | 3.80 | FLC 1x26T/E-1800lm-4000K-Ra 1b | 27 W | Gx24q-3 | GREY9007 |

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated