

1547 Clessidra 4 LED direct or indirect light - LAMP E27



Housing: Made of die-cast aluminium
 Diffuser: Tempered glass, resistant to impact and thermal shock .
 Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.
 Life 15.000h
 Power factor >= 0.95
 Photobiological safety class: exempt group EN62471.

3° IP
IK

 IP65 

UV 


  

  IK07

CLD
S+L

Download

- DXF 2D
- 1547.dxf
- 3DS
- disano_1547_clessidra.3ds
- 3DM
- disano_1547_clessidra.3dm
- Montaggi
- clessidra 06-20.pdf
- BIM
- 1547 Clessidra 4 LED direct or indirect light - LAMP E27 -

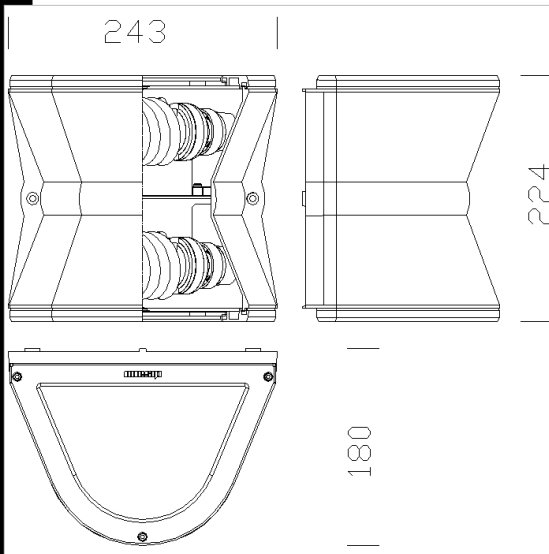

Code	Gear	Kg	Lumen-K-CRI	WTot	Colour
420561-00	S+L	2.22	LED-1550lm-2700K-CRI 80	14 W	GREY9007
420562-00	S+L	2.22	LED-1550lm-2700K-CRI 80	14 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated