


**Download**

- DXF 2D  
- 1548.dxf
- 3DS  
- disano\_1548\_clessidra.3ds
- 3DM  
- disano\_1548\_clessidra.3dm

**1548 Clessidra direct or indirect light with lens**

Housing: Made of die-cast aluminium  
 Diffuser: Tempered glass, resistant to impact and thermal shock .  
 Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.  
 Lampholder: Ceramic with silver-plated contacts  
 Electric gear: 230V-50Hz power supply. Double silicone insulation with fibreglass braid. 3P terminal block (maximum allowed lead cross section 2.5 sqmm.)  
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

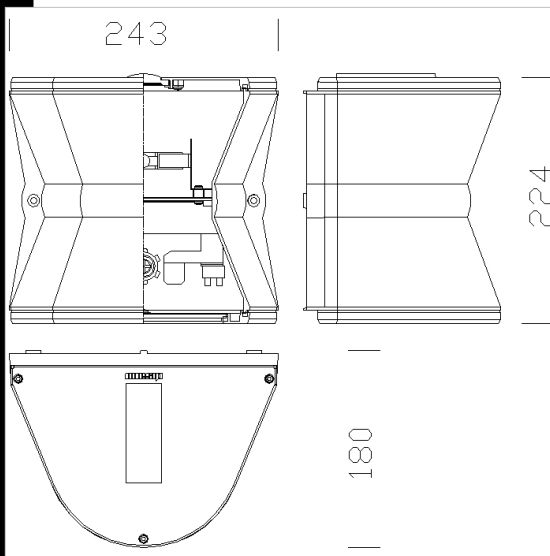

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
420570-00	S+L	1.90	ALO 100-1600lm-3000K-Ra 100	100 W	R7s	GREY9007
420572-00	S+L	1.90	ALO 100---	100 W	R7s	GRAPHITE
420573-00	CELL	2.00	CDM-TM 20---	25 W	PGJ5	GRAPHITE
420571-00	CELL	2.00	CDM-TM 20-1650lm-3000K-Ra 1b	25 W	GU6.5	GREY9007

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated