

1549 Clessidra direct light

Housing: Made of die-cast aluminium


Diffuser: Tempered glass, resistant to impact and thermal shock .

Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Lampholder: Ceramic with silver-plated contacts

Electric gear: 230V-50Hz power supply. Double silicone insulation with fibreglass braid. 3P terminal block (maximum allowed lead cross section 2.5 sqmm.)

Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

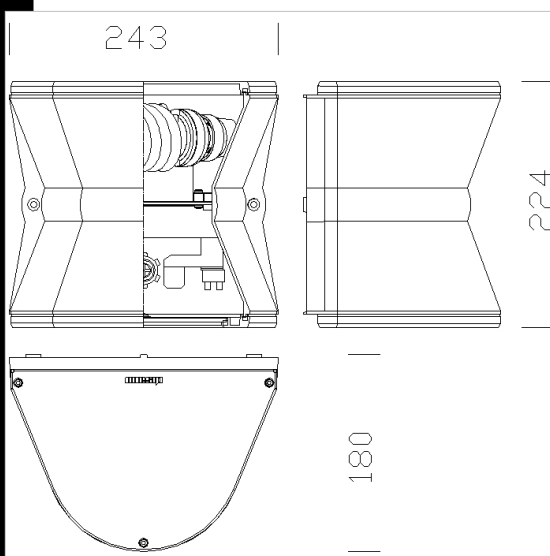

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
420582-00	S+L	1.98	FLC 1x23EL-1550lm-2700K-Ra 1b	16 W	E27	GRAPHITE
420581-00	S+L	1.98	FLC 1x23EL-1550lm-2700K-Ra 1b	16 W	E27	GREY9007

Download

DXF 2D
- 1549.dxf

3DS
- disano_1549_clessidra.3ds

3DM
- disano_1549_clessidra.3dm

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated