




### 1550 Clessidra 4 LED direct / indirect light

Housing: Made of die-cast aluminium  
 Diffuser: Tempered glass, resistant to impact and thermal shock .  
 Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.  
 Life 50.000h 70% L70B50  
 Power factor >= 0.95  
 Photobiological safety class: exempt group EN62471.

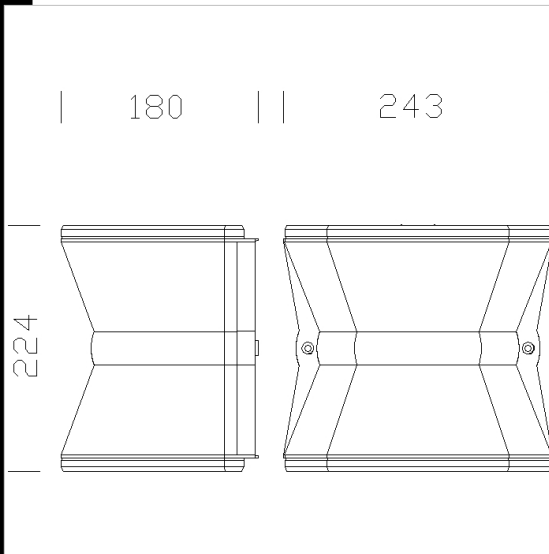

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
420590-00	CLD	2.68	LED-922lm-4000K-CRI 90	40 W	GREY9007
420592-00	CLD	2.68	LED-922lm-4000K-CRI 90	40 W	GRAPHITE
420583-00	CLD	2.44	LED-555lm-3000K-CRI 90	20 W	GREY9007
420584-00	CLD	2.46	LED-555lm-3000K-CRI 90	20 W	GRAPHITE



**Download**  
 DXF 2D  
 - 1550i.dxf  
 3DS  
 - disano\_1550\_clessidra.3ds  
 3DM  
 - disano\_1550\_clessidra.3dm  
 Montaggi  
 - clessidra 06-20.pdf  
 BIM  
 - 1550\_Clessidra 4 LED direct indirect light - 20200611.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated