




### 1554 Clessidra 5 LED direct or indirect light

Housing: Made of die-cast aluminium  
 Diffuser: Tempered glass, resistant to impact and thermal shock .  
 Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.  
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard. life 70% 50.000h L70B50.  
 Power factor >= 0,95  
 Photobiological safety class: exempt group EN62471.

**Download**

- DXF 2D  
- 1550i.dxf
- 3DS  
- disano\_1554\_clessidra.3ds
- 3DM  
- disano\_1554\_clessidra.3dm
- Montaggi  
- clessidra 06-20.pdf
- BIM  
- 1554 Clessidra 5 LED direct or indirect light - 20200611.zip

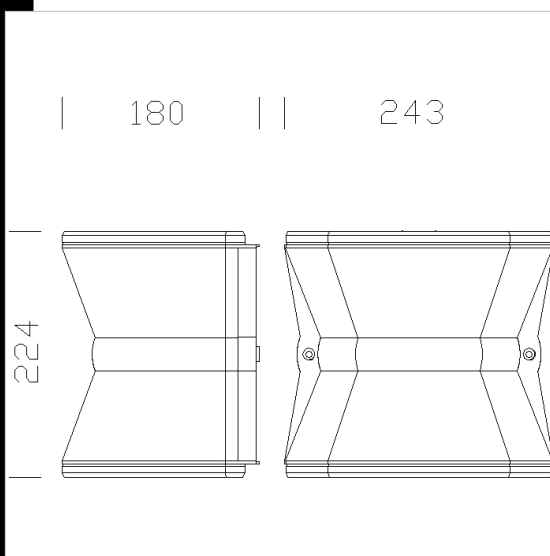

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
420598-00	CLD	1,98	LED-880lm-4000K-CRI 80	22 W	GREY9007
420599-00	CLD	1,98	LED-880lm-4000K-CRI 80	22 W	GRAPHITE
420588-00	CLD	2,12	LED-562lm-4000K-CRI 80	12 W	GREY9007
420589-00	CLD	2,10	LED-562lm-4000K-CRI 80	12 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated