

1556 Brick - direct - indirect light



Housing/Cover: in die-cast aluminium.
Diffuser: in tempered glass, 4 mm thick, resistant to thermal shocks and impacts.


Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Equipment: complete with plate for wall-mounting and cable with waterproof connector, IP67 socket-plug for simple and quick installation.

Standards: manufactured pursuant to EN 60598-CEI 34.21 and with a degree of protection pursuant to EN 60529.

Power factor >0.9.

Photobiological safety class: exempt group EN62471.

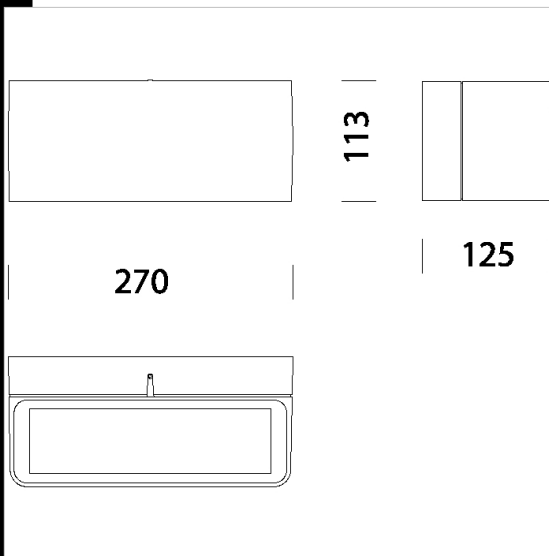

Code	Gear	Kg	Lumen-K-CRI	WTot	Colour
420600-00	CLD	2.30	LED-1440lm-3000K-CRI 80	19 W	GREY9007
420601-00	CLD	2.90	LED-1440lm-3000K-CRI 80	19 W	BIANCO
420602-00	CLD	2.32	LED-1440lm-3000K-CRI 80	19 W	GRAFITE



Download

DXF 2D
- 1556i.dxf

3DS
- disano_1556_brick.3ds

3DM
- disano_1556_brick.3dm

Montaggi
- BRICK.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated