


Download
 DXF 2D
 - 1557i.dxf
 3DS
 - disano_1557_brick.3ds
 3DM
 - disano_1557_brick.3dm
 Montaggi
 - BRICK.pdf
 BIM
 - 1557 Brick - direct - indirect light with lens - 20200528.zip



1557 Brick - direct - indirect light with lens

Housing/Cover: in die-cast aluminium.
 Diffuser: in tempered glass, 4 mm thick, resistant to thermal shocks and impacts.
 Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
 Equipment: complete with plate for wall-mounting and cable with waterproof connector, IP67 socket-plug for simple and quick installation.
 Standards: manufactured pursuant to EN 60598-CEI 34.21 and with a degree of protection pursuant to EN 60529
 Power factor >0.9.
 Photobiological safety class: exempt group EN62471.

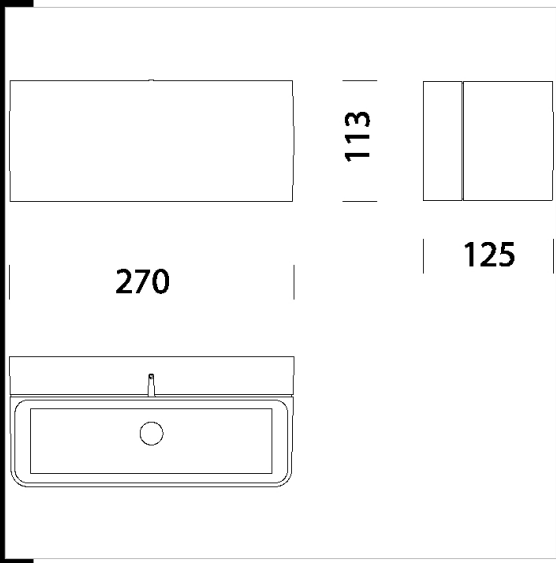

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
420610-00	CLD	2.30	LED-890lm-3000K-CRI 80	11 W	GREY9007
420611-00	CLD	2.32	LED-890lm-3000K-CRI 80	11 W	WHITE
420612-00	CLD	2.30	LED-890lm-3000K-CRI 80	11 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated