




Download

- DXF 2D
- 1558i.dxf
- 3DS
- disano_1558_brick.3ds
- 3DM
- disano_1558_brick.3dm
- Montaggi
- BRICK.pdf
- BIM
- 1558 Brick - direct light - 20200528.zip



1558 Brick - direct light

Housing/Cover: in die-cast aluminium.
 Diffuser: in tempered glass, 4 mm thick, resistant to thermal shocks and impacts.
 Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
 Equipment: complete with plate for wall-mounting and cable with waterproof connector, IP67 socket-plug for simple and quick installation.
 Standards: manufactured pursuant to EN 60598-CEI 34.21 and with a degree of protection pursuant to EN 60529.
 Power factor >0.9.
 Photobiological safety class: exempt group EN62471.

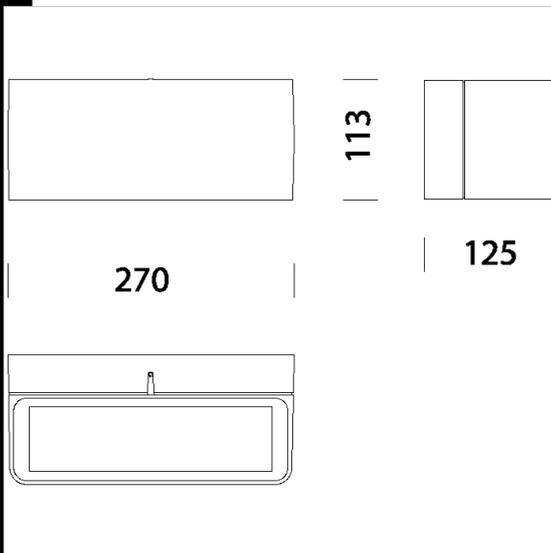

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
420620-00	CLD	2.24	LED-730lm-3000K-CRI 80	10 W	GREY9007
420621-00	CLD	2.26	LED-730lm-3000K-CRI 80	10 W	WHITE
420622-00	CLD	2.24	LED-730lm-3000K-CRI 80	10 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated