



1574 Square - direct/indirect light


Housing: in die-cast aluminium. Diffuser: in extra-clear tempered glass, 4 mm thick, thermal shock and impact resistant. Optics: in high-performance metallic V0 polycarbonate. Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Standard supply: supplied with plate for wall installation and cable with with airtight connector for mains connection. Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0.92

Photobiological safety class: exempt group EN62471.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards. On request: DIMM 1/10 or DALI versions. Coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments.

Mounting: rapid connection, the fixture does not need to be opened.

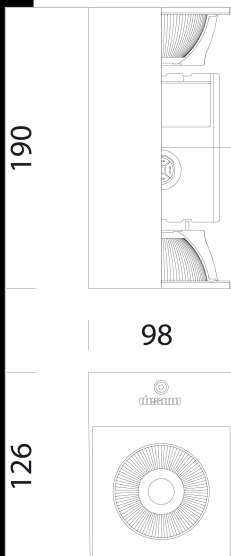

Download

- DXF 2D  
- 1574.dxf
- 3DS  
- disano\_1574\_square.3ds
- 3DM  
- disano\_1574\_square.3dm
- Montaggi  
- square 04-21.pdf
- BIM  
- 1574 Square - direct indirect light - 20200611.zip

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
420631-00	CLD	2.34	LED COB-2167lm-4000K-CRI 90	29 W	WHITE
420632-00	CLD	2.18	LED COB-2167lm-4000K-CRI 90	29 W	GRAPHITE
420634-00	CLD	2.18	LED COB-2015lm-3000K-CRI 90	29 W	WHITE
420635-00	CLD	2.18	LED COB-2015lm-3000K-CRI 90	29 W	GRAPHITE
420631-73	CLD	2.34	LED COB AMBER-3178lm-2200K-amber-	26 W	WHITE
420632-73	CLD	2.18	LED COB AMBER-3178lm-2200K-amber-	26 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated