




Download

- DXF 2D
- 1577.dxf
- 3DS
- disano_1577_square.3ds
- 3DM
- disano_1577_square.3dm
- Montaggi
- square 04-21.pdf
- BIM
- 1577 Square - direct light - 20200611.zip

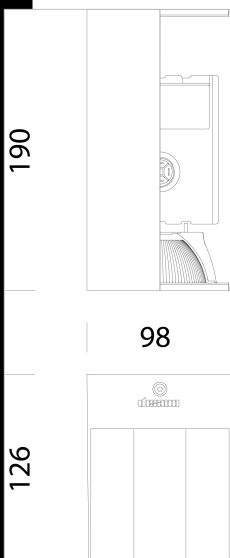

1577 Square - direct light

Housing: in die-cast aluminium. Diffuser: in extra-clear tempered glass, 4 mm thick, thermal shock and impact resistant. Optics: in high-performance metallic V0 polycarbonate. Coating: cycle de peinture liquide standard, par immersion, se compose de plusieurs phases : une première phase de prétraitement superficiel du métal, une couche de peinture cataphorèse résistante à la corrosion et au brouillard salin, une couche finale de peinture liquide acrylique bi-composante stabilisée aux rayons UV.

Standard supply: supplied with plate for wall installation and cable with with airtight connector for mains connection. Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0.92

Photobiological safety class: exempt group EN62471.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards. On request: DIMM 1/10 or DALI versions. Coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments. Mounting: rapid connection, the fixture does not need to be opened.

| Code | Gear | Kg | Lumen Output-K-CRI | WTot | Colour |
|-----------|------|------|-----------------------------|------|----------|
| 420651-00 | CLD | 2.30 | LED COB-2800lm-4000K-CRI 90 | 28 W | WHITE |
| 420652-00 | CLD | 2.14 | LED COB-2800lm-4000K-CRI 90 | 28 W | GRAPHITE |
| 420654-00 | CLD | 2.90 | LED COB-2604lm-3000K-CRI 90 | 28 W | WHITE |
| 420655-00 | CLD | 2.90 | LED COB-2604lm-3000K-CRI 90 | 29 W | GRAPHITE |
| 420656-00 | CLD | 2.90 | LED COB-1083lm-4000K-CRI 90 | 15 W | WHITE |
| 420657-00 | CLD | 2.90 | LED COB-1083lm-4000K-CRI 90 | 15 W | GRAPHITE |
| 420658-00 | CLD | 2.90 | LED COB-1007lm-3000K-CRI 90 | 15 W | WHITE |
| 420659-00 | CLD | 2.90 | LED COB-1007lm-3000K-CRI 90 | 15 W | GRAPHITE |

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated