


Download

- DXF 2D
- 1260vg.dxf
- 3DS
- 1260_vega.3ds
- 3DM
- 1260_vega.3dm

1260 Vega



Housing: In fiberglass nylon, vandal resistant.
 Diffuser: In matt polycarbonate, anti-dazzle, vandal resistant and V2 self-extinguishing, UV-stabilized.
 Reflector: In hammered anodized, polished 99.85 aluminium.
 Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket 2G11.
 Electric gear: 230-240V/50Hz power supply with conventional ballast. Hard wire, 0.50 sqmm cross section, PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P+T terminal block, with maximum allowed lead cross section of 2.5 sqmm.
 Equipment: Gasket in environment-friendly material. Cable gland in f.g. nylon Ø 1/2 gas thread (cable min Ø 9 max Ø 12). Retained antivandal steel screws.
 Regulations: Produced according to applicable EN60598 -1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.

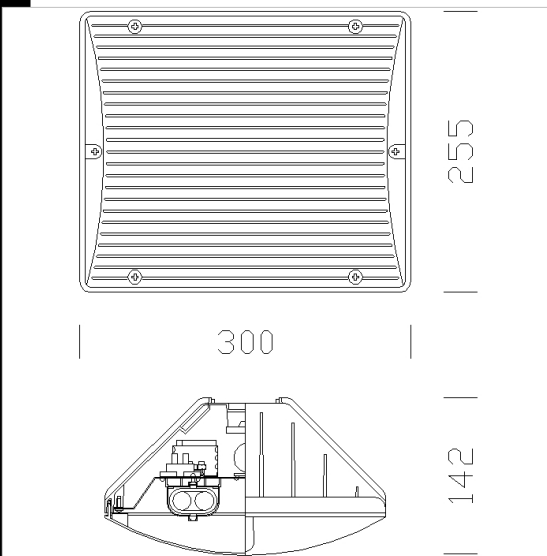

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
420668-00	CELL	1,98	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	SANDBLASTED SILVER
420667-00	CELL	1,94	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	BLACK

Accessori



- 1266 tilting joint

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated